

09-21-00

A

Case Docket No. FUJH 17.759
 Filed by Express Mail
 (Receipt No. EL522335455US)
 on September 20, 2000
 pursuant to 37 CFR 1.10
 by Lydia Gonzalez

THE COMMISSIONER OF PATENTS AND TRADEMARKS
 Washington D.C. 20231
 Box Patent Applications

S I R:

Transmitted herewith for filing is: ☒ a new application
☐ a c-i-p application of S.N. _____ filed _____

Inventor(s): Shin-ichiro TAGO; Taizo SATO; Yoshimasa TAKEBE; Yasuhiro YAMAZAKI;
 Teruhiko KAMIGATA; Atsuhiko SUGA; Hiroshi OKANO; Hitoshi YODA

For INFORMATION PROCESSING DEVICE

Enclosed are:

- ☒ 18 sheets of drawings.(Figs. 1-21)
☒ Specification, including claims and abstract (88 pages)
☒ Declaration
☒ An assignment of the Invention to FUJITSU LIMITED
☒ A certified copy of Japanese Application No(s). 11-341014 and 11-276625
☒ An associate power of attorney
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
☒ Post card
☒ Recording fee (as indicated below)
☒ Information Disclosure Statement, PTO-1449, copies of 1 references
☐ Other _____
☐ Other _____

09/20/00
 09/666853
 09/20/00

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	18-20 =	0
INDEP CLAIMS	5-3 =	2
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$345
x 9 =	\$
x 39 =	\$
x 130 =	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$690
x 18 =	\$
x 78 =	\$156
x 260 =	\$
TOTAL	\$846


☐ Please charge our Deposit Account No. 08-1634 the amount of _____ to cover the filing fee and recording fee (if any)

☒ A check in the amount of \$886.00 to cover the filing fee and the recording fee (if any) is enclosed.

☒ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Helfgott & Karas, P.C.
 60th Floor
 Empire State Building
 New York, New York 10118-6098
 (212)643-5000

Respectfully Submitted,

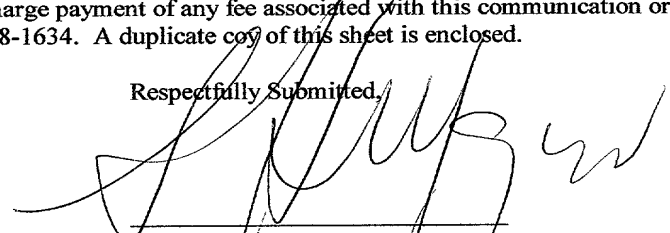

Date: 9/20/00

Any fee due with this paper, not fully covered by an enclosed check, may be charged on Deposit Acct No. 08-1634

- ☐ Aaron B. Karas, Reg. No. 18,923
☒ Samson Helfgott, Reg. No. 23,072
☐ Leonard Cooper, Reg. No. 27,625
☐ Linda S. Chan, Reg. No. 42,400
☐ Jacqueline M. Steady, Reg. No. 44,354
☐ Harris A. Wolin, Reg. No. 39,432
☐ Brian S. Myers, Reg. No. 46,947

INFORMATION PROCESSING DEVICE

BACKGROUND OF THE INVENTION

5 1. Filed of the Invention

The present invention relates to an information processing device which reads instructions, buffers and executes instructions by pipeline processing, and more particularly, to an information processing device which can reduce pipeline branching confusion when executing instruction sequences comprising branching instructions.

The present invention further relates to a memory bus access system for an information processing device which performs instruction fetching, instruction buffering and instruction decoding and execution by pipeline processing, and more particularly provides an efficient memory bus access system in a dual instruction fetch-type information processing system which performs parallel fetches for branching-generating side instruction sequence (referred to below as target side instruction sequence) and non-branching-generating side sequence (referred to below as sequential side instruction sequence).

25 2. Description of the Related Art

In information processing devices such as

microprocessors which have employed pipeline processing, the reading of consecutive instruction sequences is performed successively without waiting for the execution of the individual instructions to be completed and the
5 aforementioned instructions are buffered in an instruction buffer in such a way that there are no empty spaces in the execution cycle of the execution unit. However, when there is a branching instruction in the instruction sequence, the branch target instruction which has the possibility
10 of being executed directly after this branching instruction becomes an instruction which does not follow in address from that branching instruction and the pipeline processing becomes confused, possibly reducing the efficiency of the information processing device.

15 For this reason, a method has been devised in which, if the information processing device has read a branching instruction, the branch target instruction sequence of that branching instruction is read in advance and buffered in an instruction buffer so that the confusion of the pipeline
20 processing is minimized.

Figure 13 shows a general constructional diagram of a conventional information processing device which performs such pipeline processing. A conventional information processing device has an instruction store 11
25 which stores the instruction sequence which is to be executed, an instruction buffering portion 12 which buffers the instruction read from the instruction store 11 and

000260" 092000
supplies to the decoder 21 the instruction whose execution
is predicted, an instruction execution unit 20 provided
with a decoder 21 which decodes the instruction supplied
from the instruction buffering portion 12 and, if that
5 instruction is a branching instruction, supplies a branch
target address information (usual corresponding address)
to a branch target address generating portion 16, a branch
target address generating portion 16 which generates branch
target addresses on the basis of the branch target address
10 information which is received from the decoder 21 and a
current address counter value, and an instruction reading
request portion 17 which selects the instruction address
to be read next from among the program counter values or
branch target addresses received from the branch target
15 address generating portion 16, or the addresses which have
been requested from the instruction execution unit 20,
supplies this address to the instruction store 11 and
executes the instruction reading request.

In this type of information processing device, the
20 decoder 21 decodes instructions which are supplied from
the instruction buffering portion 12 and, if it detects
that this instruction is a branching instruction, before
the execution of this branching instruction, generated is
the address of the branch target instruction which is a
25 candidate to be the next instruction executed after this
branching instruction, and this branch target instruction
and the following instruction sequence can be read from

the instruction store 11 in advance and buffered in the instruction buffering portion 12.

Therefore, when the branching to a branch target instruction has been determined as a result of the execution of a destination instruction, or when branching to a branch target instruction has been predicted, it is possible to process a branching instruction sequence at high speed with a low level of pipeline processing confusion by fetching this branch target instruction sequence from the instruction buffering portion 12 to the instruction execution unit 20.

In such a case, if instruction buffers for a plurality of sequences are provided in the instruction buffering portion 12, the branch target instruction sequence which is predicted to branch can be respectively buffered in the instruction buffers for a plurality of sequences and when it has been decided to perform branching the branch target instruction can be quickly fetched from the instruction buffer so that even when branching instructions consecutively follow, pipeline confusion can be reduced.

However, the constitution according to the prior art provides multi-sequence instruction buffers so that all the branch target instruction sequences which are predicted to branch can be buffered when there is a large number of branching instructions. This results in a disadvantageous increase in the hardware (instruction buffer) of the information processing device.

In addition, because in the information processing device according to the prior art it was necessary to decode branching instructions so as to generate branch target addresses in order to read branch target instruction sequences of the branching instructions, a large amount of processing time was required after reading the branching instruction until the branch target instruction corresponding to the aforementioned branching instruction was read, so that an instruction buffer for a plurality of instruction sequences could not be employed effectively.

The microprocessor (or information processing device) which relates to a second aspect of the invention and which performs instruction fetching, instruction buffering, instruction decoding and instruction execution by pipeline processing, performs high speed processing because it performs consecutive instruction sequence instruction fetching in advance, without any gaps in the execution stages in the execution unit. However, if there are branching instructions present inside the instruction sequence, which instruction sequence is fetched next varies depending on whether the system waits for the execution of that branching instruction and branches on the target side instruction sequence or whether it continues on the sequential side instruction sequence. As a result of this, empty spaces are generated temporally in the execution cycle of the execution unit. A target side instruction sequence is a branch target instruction sequence which is

executed when branching is carried out as a result of a branching instruction being executed, and a sequential side instruction sequence is an instruction sequence which is executed when branching is not carried out as a result of a branching instruction being executed.

In order to avoid the abovementioned situations, dual instruction fetch-type information processing devices have been proposed, in which the CPU simultaneously outputs instruction fetch requests for both target side instruction sequence and sequential side instruction sequence and stores these instructions respectively in the 2 instruction buffers inside the CPUs. In these dual instruction fetch type devices, irrespective of whether the execution of the branching instruction results in branching to the target side or not, the next instruction sequence to be executed is buffered in the instruction buffer so that it is possible to minimize the execution stage delay associated with a new instruction fetch resulting from a predicted miss for the branching direction of the branching instruction.

In addition, a CPU which is a microprocessor uses a cache memory in order to perform high speed instruction fetching. Without using an external memory bus, CPU can not fetch instructions and data from a main memory of an external component in which instructions and data and the like are stored. Because the abovementioned memory bus access operations take a comparatively long time (a large number of pipeline cycles), a cache memory which stores

instructions and data in the main memory is provided to the CPU. Usually, in the instruction fetch operation from the CPU, requests are made to the cache memory and fetched instructions are stored in the instruction buffer. When
5 the cache memory does not store the fetched instruction with resulting a cache miss, a fetch object instruction is fetched from the main memory via the memory bus and is stored in both the instruction buffer and the cache memory.

However, when a main memory bus access which makes
10 an instruction fetch from the main memory is performed frequently, the traffic on the memory bus increases. An increase in traffic on the memory busses causes delays in accessing the memory bus. In particular, it is undesirable that, in a stage before the branching instruction is
15 executed, it takes a long time to fetch from the main memory instructions which have become necessary as a result of the execution of the branching instruction, due to the fact that target side or sequential side instructions which will probably not be executed are extracted from the main memory.

SUMMARY OF THE INVENTION

Therefore, the object of the present invention is to restrict the increase in the hardware for instruction
25 buffers and the like and reduce the confusion in the pipeline processing due to consecutive branching instructions in an information processing device which reads an instruction

before the aforementioned instruction is executed by pipeline processing.

A further object of the present invention is to provide a memory bus access system for an information processing
5 device which reduces the number of superfluous memory bus accesses and makes more efficient instruction fetches possible.

In order to achieve the above objects, a first aspect of the present invention is defined in that an information
10 processing device which reads, buffers, decodes and executes instructions from an instruction store portion by pipeline processing comprises: an instruction reading request portion which assigns a read address to the instruction store portion; an instruction buffering
15 portion including a plurality of instruction buffers which buffer an instruction sequence read from the instruction store portion; an instruction execution unit which decodes and executes instructions buffered by the instruction buffering portion; a branching instruction detection
20 portion which detects a branching instruction in the instruction sequence read from the instruction store portion; and a branch target address information buffering portion including a plurality of branch target address information buffers which, when the branching instruction
25 detection portion has detected a branching instruction, buffer the branch target address information for generating the branch target address of the branching instruction;

wherein, when the branching instruction detection portion has detected a branching instruction, either the branch target address information of the branching instruction is stored in one of the plurality of branch target address information buffers, or the branch target instruction sequence of the branching instruction is stored in one of the plurality of instruction buffers in addition to the storing in the branch target address information buffer.

In order to achieve the above objects, a second aspect of the present invention is defined in that an information processing device which reads, buffers, decodes and executes instructions from an instruction store portion by pipeline processing comprises: an instruction reading request portion which assigns a read address to the instruction store portion; an instruction buffering portion including a plurality of instruction buffers which buffer an instruction sequence read from the instruction store portion; an instruction execution unit which decodes and executes instructions buffered by the instruction buffering portion; a branching instruction detection portion which detects a branching instruction in the instruction sequence read from the instruction store portion; and a branch target address information buffering portion including a plurality of branch target address information buffers which, when the branching instruction detection portion has detected a branching instruction, buffer the branch target address information for generating

the branch target address of the branching instruction;
 wherein, the first instruction sequence being processed
 is stored in either one of the first or second instruction
 buffer and when the branching instruction detection portion
 5 detects the branching instruction in the first instruction
 sequence, a second instruction sequence of the branch
 target is stored in the other one of the first or second
 instruction buffers in accordance with the branch target
 address information of the branching instruction, the
 10 branch target address information of the next branching
 instruction in the first instruction sequence is stored
 in either one of the first or second branch target address
 information buffer, and the branch target address
 information of the branching instruction in the second
 15 instruction sequence is stored in the other one of the first
 or second branch target address information buffer.

Because this invention has a branching instruction
 detection portion which detects branching instructions in
 an instruction sequence which has been read from
 20 instruction store portion, a branching instruction in an
 instruction sequence which has been read can be detected
 before the decoding of the instruction buffered inside the
 first or second instruction buffer.

In addition, when the branching instruction is in the
 25 first instruction sequence, since it is necessary to employ
 at least the first and second instruction buffers which
 store the first instruction sequence that is being

processed and the second instruction sequence of the branch target, the hardware for instruction buffering portions which store the branch target instruction sequence can be reduced.

5 In addition, the branch target address information of the next branching instruction inside the first instruction sequence being processed and the branch target address information of the next branching instruction inside the second instruction are stored in the first and
10 the second branch target address information buffer. For this reason, by processing the branching instruction, irrespective of whether the system is in the branching state or in the non-branching state, it is possible to read the branch target instruction sequence immediately by this
15 stored branch target address information, and the confusion in the pipeline processing due to consecutive branching instructions can be reduced.

 In order to achieve the above objects, a third aspect of the present invention is defined in that an information
20 processing device comprises: an instruction fetch portion which fetches both a sequential side instruction sequence and a target side instruction sequence of a branching instruction; a cache controller which fetches instructions from a cache memory or from a main memory in response to
25 a fetch request from the instruction fetch portion; a memory bus access portion which accesses the main memory; an instruction buffer which buffers instructions which have

been fetched; and a branching prediction portion which, prior to an execution of a branching instruction, performs a branching prediction for the branching instruction stored in the instruction buffer; wherein if the branching
5 direction of the branching instruction is not yet determined, the cache controller performs a memory bus access to the main memory according to a branching direction predicted by the branching prediction portion.

In the aforementioned invention, in the preferred
10 first embodiment, while the branching direction of the branching instruction is not determined, if the cache controller has performed a cache miss with respect to an instruction in the predicted branching direction of the branching instruction, the cache controller performs the
15 memory bus access to the main memory for an instruction fetch, and if the cache controller has performed a cache miss with respect to an instruction which is not in the predicted branching direction, the cache controller does not perform the memory bus access and stops the instruction
20 fetch.

That is, in the first case, if the predicted branching direction of the branching instruction is the target side and a cache miss has been made with respect to an instruction on the sequential side, the memory bus access is not
25 performed and the instruction fetch is stopped, while in the second case, if the predicted branching direction of the branching instruction is the sequential side and a cache

miss has been made with respect to an instruction on the target side, the memory bus access is not performed and the instruction fetch is stopped. In cases other than these, the cache controller performs the memory bus access and
5 performs the instruction fetch.

In the present invention, in the second preferred embodiment, while the branching direction of the branching instruction is not determined, if the cache controller has performed a cache miss with respect to an instruction on
10 the target side when the predicted branching direction of the branching instruction is the sequential side, the cache controller does not perform a memory bus access and stops the instruction fetch. In cases other than these, the cache controller performs the memory bus access and performs the
15 instruction fetch. Therefore, in contrast to the first embodiment, in the second embodiment if the predicted branching direction is the target side and a cache miss is made with respect to an instruction on the sequential side, an instruction fetch is performed by a memory bus
20 access. This is because the probability of an instruction fetch on the sequential side making a cache miss is low, and in the infrequent case, it is rarely necessary to stop a memory bus access.

In order to achieve the above objects, a fourth aspect
25 of the present invention is defined in that an information processing device comprises: an instruction fetch portion which fetches both a sequential side instruction sequence

and a target side instruction sequence of a branching instruction; a cache controller which fetches instructions from a cache memory or from a main memory in response to a fetch request from the instruction fetch portion; a memory
5 bus access portion which accesses the main memory; and an instruction buffer which buffers instructions which have been fetched; and a branching prediction portion which, prior to an execution of a branching instruction, performs a branching prediction for the branching instruction which
10 is stored in the instruction buffer; wherein, if the branching direction of said branching instruction is not yet determined and said cache controller performs a cache miss with respect to an instruction fetch, said cache controller does not perform a memory bus access and stops
15 the instruction fetch, and if said branching instruction has been determined and said cache controller performs a cache miss with respect to an instruction in the determined branching direction, said cache controller performs a memory bus access.

20 In the aforementioned invention, a memory bus access after a cache miss is performed only with respect to an instruction in the branching direction after the determination of the branching, allowing the traffic on the memory bus to be reduced. In other words, at the stage
25 in which the branching is not determined, it is unclear whether or not the instruction is used so that there is a general prohibition on making a memory bus access after

a cache miss. In addition, when branching is not yet determined an instruction on the target side is perfected to the instruction buffer, as long as the instruction is stored in the cache memory.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic view of an embodiment of the information processing device according to the present invention;

Figure 2 is an explanatory diagram showing a basic form of an instruction sequence comprising a branching instruction;

Figure 3 shows an example of an instruction sequence processed in the information processing device;

Figure 4 is an explanatory diagram showing the branching route of the instruction sequence in Figure 3;

Figure 5 is a timing chart for the branching route (1) in Figure 4;

Figure 6 is an explanatory diagram showing the contents of the instruction buffer at cycle 3 of branching route (1);

Figure 7 is an explanatory diagram showing the contents of the instruction buffer at cycle 6 of branching route (1);

Figure 8 is an explanatory diagram showing the contents of the instruction buffer at cycle 9 of branching route

(1);

Figure 9 is a timing chart for branching route (2) in Figure 4;

Figure 10 is a timing chart for branching route (3) in Figure 4;

Figure 11 is an explanatory diagram showing the contents of the instruction buffer at cycle 6 of branching route (3);

Figure 12 is a timing chart for branching route (4) in Figure 4;

Figure 13 is a schematic view of a conventional information processing device;

Figure 14 is a system diagram of an embodiment of the information processing device according to the present invention;

Figure 15 is a block diagram of a cache controller;

Figure 16 is a table showing instruction fetch operations in a first control example;

Figure 17 is a table showing instruction fetch operations in a second control example;

Figure 18 is a table showing instruction fetch operations in a third control example;

Figure 19 is a table showing instruction fetch operations in a fourth control example;

Figure 20 is a table showing specific pipeline operations when memory bus accesses have been limited by the aforementioned first and second control examples

Figure 21 is a table showing specific pipeline operations of an example of the prior art.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

5

Embodiments of the present invention are explained below with reference to the figures. However, they are only intended by way of example and should be not be considered as restricting the scope of the invention.

10

Figure 1 is a schmematic view of a first embodiment of an information processing device according to the present invention which performs pipeline processing, and Figure 2 shows a basic form of an instruction sequence comprising a branching instruction. This basic form of an instruction sequence is a configuration of instruction sequence C1 extending from instruction 01 to instruction 08, instruction sequence C2 extending from instruction 11 to instruction 16, instruction sequence C3 extending from 41 to 46, and instruction sequence C4 extending from 21 to 28. In addition, the instruction sequence in Figure 2 comprises branching instruction 02 which branches to instruction sequence C2, branching instruction 04 which branches to instruction sequence C3 and branching instruction 12 which branches to instruction sequence C4.

15

20

25

The instruction sequence in which the branching instruction 12 is present inside the branch target instruction sequence C2 when the branching instruction 02

has branched and the next branching instruction 04 is present inside the original instruction sequence C1 when the branching instruction 02 does not branch, can be the most typical instruction sequence having branching
5 instructions. Next, the configuration and each block operation of the information processing device according to the embodiment of the present invention will be explained with reference to Figures 1 and 2.

The information processing device according to this
10 embodiment has the instruction store 11 in which the instruction sequences C1 - C4 (shown for example in Figure 2) are stored; the instruction buffering portion 12 which buffers the instruction read from the instruction store 11, and based on the branching prediction supplied by the
15 branching prediction portion 13, supplies the instruction which is predicted to be executed next to the decoder 21; the decoder 21 which decodes the instruction which has been supplied by the instruction buffering portion 12; the instruction execution unit 20 provided with an instruction
20 execution portion 22 which executes instructions in accordance with the control signal supplied by the decoder 21, and writes the results of the computations to registers and the like (not shown); and an instruction reading request portion 17 which selects the instruction address which is
25 to be read next, using the selector means 23, from the program counter value, the branch target address received from the branch target address generating portion 16, or the

addresses supplied by the instruction execution unit 20,
and implements the instruction reading request to the
instruction store 11.

In addition, the information processing device of the
5 present embodiment comprises, in contrast with the prior
art, a branching instruction detection portion 14 which
reads an instruction from the instruction store 11 to the
instruction buffering portion 12, and detects, at the stage
of storage in instruction buffer e-1 or e-2, the presence
10 of a branching instruction and transmits a relative address
corresponding to the branch target instruction to the
branch target address information buffering portion 15.
Moreover, the information processing device of the present
embodiment has a branch target address buffering portion
15 15 which buffers the relative addresses corresponding to
the branch target instructions supplied by the branching
instruction detection portion 14 and program counter values
corresponding to the aforementioned branching instruction
supplied via the delay circuit 19 by the instruction reading
20 request portion 17, and a branch target address generating
portion 16 which sums the program counter values, received
from the branch target address information buffering
portion 15, and the corresponding addresses so as to
generate the branch target addresses.

25 Next, there will be a detailed explanation of each
of the main constituent portions of the present embodiment
of the information processing device. The instruction

buffering portion 12 comprises at least the two instruction buffers e-1 and e-2. At certain times, from among the instruction sequences C1, C2, C3, C4 (shown in Figure 2), instruction sequences being processed, and branch target instruction sequences from the branching instructions inside the instruction sequences being processed are stored in these instruction buffers e-1, e-2. In addition, the instruction reading request portion 17 reads, for example once every 2 instructions, instruction sequences stored in the instruction store 11. The instruction sequence read is buffered in the order of the addresses in instruction buffer e-1 or instruction buffer e-2 which has been selected in advance.

The fetch addresses corresponding to the instruction sequences stored in the instruction buffers e-1 and e-2 are respectively stored in fetch address registers d-1 and d-2 inside the instruction reading request portion 17 and are incremented by the address incrementing means 18.

For example, if the instructions 01, 02 from instruction sequence C1 are buffered in instruction buffer e-1, and the next instruction address 03 is buffered in the fetch address register d-1 of the instruction reading request portion 17, the instructions 03, 04 from the instruction sequence C1 are read and buffered after the preceding instruction sequences 01, 02 in the instruction buffer e-1.

On the other hand, if the instructions 11, 12 from

instruction sequence C2 are buffered in instruction buffer e-2, and the next instruction address 13 is buffered in the fetch address register d-2 of the instruction reading request portion 17, the instructions 13, 14 from the instruction sequence C2 are read and buffered after the preceding instruction sequences 11, 12 in the instruction buffer e-2.

The instruction buffering portion 12 supplies to the decoder 21, from one of the instruction buffers e-1 or e-2, the instruction which, on the basis of the branching prediction of the branching prediction portion 13, is predicted to be the next to be executed. In this case, the branching prediction of the branching prediction portion 13 is, for example, performed with reference to the hint bit which indicates the branching priority level associated with the branching instruction. In addition, when it has become apparent that the instruction sequence (for example C1 or C) which is buffered in the instruction buffering portion 12 e-1 or e-2 is not being used as a result of the branching of a branching instruction or the like being determined, the instruction sequence which is buffered at that time is invalidated, so that the branch target instruction sequence which is newly read (for example C4 or C3) can be buffered. Furthermore, a bypass route which supplies the instructions read from the instruction store 11 to the decoder 21 without passing through the instruction buffers e-1 and e-2 is provided in the instruction buffering

portion 12. By this means it is possible to supply the read instruction immediately to the execution unit 20.

The branching instruction detection portion 14 detects the presence of branching instructions inside the instruction sequence read from the instruction store 11. In this case, if just one of the 2 instructions read once is a branching instruction, the relative address corresponding to the branch target instruction of that branching instruction is sent to the branch target address information buffer 15.

On the other hand, if both of the 2 instructions read once from the instruction store 11 are branching instructions, the relative address corresponding to the branch target instruction of those branching instructions which has the greater possibility of branching is sent to the branch target address information buffering portion 15. In this case, the possibility of branching is assessed by the hint bits associated with the branching instructions. Furthermore, if there is not even one branching instruction present among the instructions read, nothing is done.

The branch target address information buffering portion 15 receives the fetch address corresponding to the branching instruction sent to the buffering portion 15 via the delay circuit 19 from the instruction reading request portion 17, and the relative address corresponding to the branch target instruction sent to buffering portion 15 from the branching instruction detection portion 14 (the fetch

address and the relative address of the branch target instruction are referred to below as branch target address information). Which of the branch target address information will be buffered and which will be deleted is
5 determined according to the priority level of the branch target address information buffered at that time, and the branch target address information which it has been decided to buffer is buffered.

For example, in the instruction sequence shown in
10 Figure 2, if the branching instruction 02 inside instruction sequence C1 is being processed, the address information of the branch target instruction 41 of the next branching instruction 04 contained in the instruction sequence C1 being processed is buffered in the first branch
15 target address information register b-1. In addition, the address information of the branch target instruction 21 of the next branching instruction 12 contained in the branch target instruction sequence C2 of the first branching instruction 02 of instruction sequence C1 being processed
20 is buffered in the second branch target address information register b-2.

If branch target address information is stored in the first branch target address information register b-1, the branch target address information buffering portion 15
25 sends, at a time of the invalidation of one of the instruction buffers e-1 or e-2 as a result of branching being determined or the like, the branch target address information buffered

in the first branch target address information register b-1 to the branch target address generating portion 16. After this, the branch target address information buffered in the first branch target address information register
5 b-1 is invalidated and it becomes possible to buffer the next branch target address information.

For example, if the address information of the branch target instruction 41 is stored in the first branching instruction address destination register b-1 and it has
10 been determined that the branching instruction 02 has not branched, the instruction sequence C2 buffered in instruction buffer e-2 is invalidated. Then, the address information of the branch target instruction 41 is sent to the branch target address generating portion 16, and
15 after this the address information of the first branch target address information register b-1 is invalidated and it becomes possible to buffer the next branch target address information of the instruction sequence C1.

On the other hand, if it has been determined, resulting
20 from the execution of the branching instruction 02 by the instruction execution portion 22, that the branching has occurred, the branch target address information of the next branching instruction 04 inside the instruction sequence C1 being processed, which data is buffered in the first
25 branch target address information register b-1, is invalidated. Furthermore, the address information of the branch target instruction 21 buffered in the second branch

target address information register b-2 is transferred to the first branch target address information register b-1.

Furthermore, if the branch target instruction sequence C2 has not been read into the instruction buffering portion 12 and it has been determined that the branching which results from the execution of the branching instruction 02 has not occurred, the branching instruction sequence C2 has not yet been read so no invalidation occurs.

In addition, if the branch target instruction sequence C2 in the instruction buffering portion 12 has not been read and it has been determined that the branching which results from the execution of the branching instruction 02 has occurred, then the branching prediction has failed. In this case, the branch target address information buffered in both the first branch target address information register b-1 and the second branch target address information register b-2 is invalidated and the branch target instruction sequence C2 of the branching instruction 02 which has determined that the branching has occurred is read and the branching processing is repeated.

Next, the instruction reading request portion 17 comprises the two fetch address registers d-1 and d-2. The fetch address register d-1 buffers the address of the following instruction from the instruction sequence buffered in the instruction buffer e-1 of the instruction buffering portion 12, and the fetch address register d-2 buffers the instruction address of the following

instruction from the instruction sequence buffered in the instruction buffer e-2. The address incrementing means 18 adds 2 to the values of the fetch address registers d1 and d2 as a function of the reading of 2 instructions each by
5 the instruction buffers e-1 and e-2.

If there is no branching, the instruction reading request portion 17 adds 2 to the fetch address register d-1 and reads the continuous instruction sequence in order to the instruction buffer e-1. On the other hand, if there
10 is branching, in other words if the instruction sequence C1 comprising the instruction 02 shown in Figure 2 is executed, 2 is added to the address of branching instruction 02 in the fetch address register d-1, and the instruction sequence C1 comprising that branching instruction 02 is
15 read in order. Further, 2 is added to the address of the branch target instruction 11 of that branching instruction 02 in the fetch address register d-2, and that branch target instruction sequence C2 is read in order to the instruction buffer e-2.

Because the present embodiment has a branching instruction detection portion 14 which detects whether a branching instruction is present in the instruction sequence read from the instruction store 11, it is possible to detect the branching instruction from inside the read
20 instruction sequence before the decoding of the instruction buffered in the instruction buffering portion 12.

In addition, if an instruction sequence comprising

000260" E239350
a branching instruction is being processed, it is advantageous to provide at least the first and second instruction buffers e-1 and e-2 which store the instruction sequence being processed and the first branch target instruction sequence, with the result that the hardware of the instruction buffering portion 12 which stores the branch target instruction sequence can be reduced.

10 In addition, the branch target address information of the next branching instruction inside the instruction sequence which is being processed and the branch target address information of the next branching instruction inside the first branch target instruction sequence are stored in the first and second branch target address information registers b-1 and b-2. For this reason, whether
15 or not branching occurs by the execution of the branching instruction, it is possible to read the branch target instruction sequence immediately using that stored branch target address information, reducing the confusion of the pipeline processing resulting from the following branching
20 instruction.

Figure 3 shows an actual example of a consecutive instruction sequence comprising branching instructions. The instruction sequence in Figure 3 is made up of an instruction sequence in which the addresses run from 01
25 to 08, an instruction sequence in which the addresses run from 11 to 16, an instruction sequence in which the addresses run from 21 to 28 an instruction sequence in which the

addresses run from 31 to 34, an instruction sequence in which the addresses run from 41 to 46, an instruction sequence in which the addresses run from 51 to 55, and an instruction sequence in which the addresses run from 61 to 66. In addition, the branch target address of the condition branching instruction 02 is 11, and the branch target instruction sequence of the condition branching instruction 02 is the instruction sequence in which the addresses run from 11 to 16.

Figure 4 shows the branching route of the instruction sequence in Figure 3. For example, the branching route (1) shown in Figure 4 has branching continuously at instruction 02 and instruction 12, and the branching route (2) branches at instruction 02 and does not branch at instruction 12. In addition, the branching route (3) does not branch at instruction 02 and branches at instruction 04, the branching route (4) does not branch either at instruction 02 or at instruction 04. The operations of each of the branching routes (1) to (4) will be explained below with reference to a timing chart.

Figure 5 shows the timing chart of the case in which the branching route (1) shown in Figure 4 has been executed by the information processing device according to an embodiment of the present invention. The signals P, T, C, D, E, W of each of the cycles in Figure 5 represent the 5 stages of the pipeline processing for one instruction, and an explanation of the contents of the processing of

each stage will be given first.

The fetch request stage (P stage) is a pipeline stage in which the instruction reading request portion 17 selects a reading instruction address from the addresses which have been supplied by the branch target address generating portion 16 or the instruction execution unit 20 and the addresses which have been incremented by the address incrementing means 18, and performs an instruction read request to the instruction store 11. Furthermore, the cache stage (T stage) is a pipeline stage which makes preparations for fetching the instruction of fetching requested address inside the instruction store 11.

The instruction fetching stage (C stage) is a pipeline stage in which the instruction read from the instruction store 11 is buffered in instruction buffer e-1, e-2, the branching instruction detection portion 14 checks whether there is a branching instruction among the read instructions and if a branching instruction is present, the relative address corresponding to the branch target instruction is sent to the branch target address information buffering portion 15 and the read instruction is sent to the decoder 21 via the bypass route so that the next instruction can be read.

The decoding stage (D stage) is a pipeline stage in which an instruction which has been received from the instruction buffering portion 12 is decoded in the decoder 21 and a control signal is generated. In addition, the

000250" E5B9950
execution stage (E stage) is a pipeline stage in which an instruction is executed in the instruction execution portion 22 on the basis of the control signal generated by the decoder 21. The branching of the branching instruction is assessed in this execution stage. The writing stage (W stage) is a pipeline stage in which the result obtained from the execution of the instruction is written to a register or the like.

Of the 5 aforementioned stages, it is the consecutive execution operations of the execution stage E which make it possible to perform pipeline processing without pipeline processing confusion and to make most efficient use of the resources of the instruction execution unit 20.

The timing chart in Figure 5 will be explained next. Figure 5 is a timing chart for the route (1) in Figure 4, and shows consecutive branching at the branching instruction 02 and the branching instruction 12.

An instruction fetch request is performed (P stage) in cycle 1 for the instructions 01, 02 according to the address inside the fetch address register d-1, and preparations to fetch the instruction are made in cycle 2 (T stage). Instructions 01, 02 are read from the instruction store 11 at cycle 3, and because both instruction buffers e-1 and e-2 are empty, the instructions are stored in instruction buffer e-1. At this time, 2 is added to the fetch address register d-1 by the address incrementing means 18, and the address 03 which follows

instructions 01, 02 is buffered.

Furthermore, in cycle 3 the branching instruction detection portion 14 detects that the instruction 02 is a branching instruction, and the branch target address information of the branching instruction 02 is buffered (C stage) in the first branch target address information register b-1.

Figure 6 shows the contents of the instruction buffer etc. when cycle 3 has finished. Instruction sequence 01 - 08 are stored in instruction buffer e-1 corresponding to fetch address register d-1 but at the time when cycle 3 has stopped, only instructions 01 , 02 are stored in instruction buffer e-1. In addition, the branch target instruction sequence 11-16 of the branching instruction 02 are stored in the instruction buffer e-2 corresponding to fetch address register d-2 but it is not yet been stored when cycle 3 finishes.

According to the above, in cycle 3, the branch target address information (the address information of instruction 11) of the first branching instruction 02 contained in the instruction sequences 01-08 which are being processed at this time are buffered in the branch target address information register b-1. However, the address information of the branch target instruction 11 buffered in branch target address information register b-1 is buffered in fetch address register d-2 after this so that it is invalidated at the following cycle. The address

information of the second branch target instruction 41 of the next branching instruction 04 of the instruction sequences 01 - 08 which are being executed is stored newly in branch target address information register b-1. It is
5 necessary to wait until the E stage of cycle 6 for the ultimate decision as to whether the branching instruction 02 branches.

On the other hand, the branch target address information of the first branching instruction 12 contained
10 in branch target instruction sequence 11 - 16 which are being read at that time is buffered in branch target address information register b-2. However, in cycle 3 the branching instruction 12 has not yet been read so that there is no buffered data and in the following cycle the address
15 information of the branch target instruction 21 of the branching instruction 12 is buffered in branch target address information register b-2.

Next, in cycle 4 in Figure 5, the branch target address generating portion 16 calculates the branch target address
20 11 of branching instruction 02 from the relative address corresponding to branch target in the branch target address information register b-1 and from the current address from the fetch address register d-1, and buffers the aforementioned address 11 in the fetch address register
25 d-2. The instruction reading request portion 17 executes the request to read branch target instructions 11 and 12 on the basis of the addresses in the fetch address register

d-2. Directly after this, the address incrementing portion 18 adds 2 to the addresses from the fetch address register d-2 and the instruction address 13 which follows the branch target instructions 11 and 12 is buffered in fetch address
 5 register d-2. In addition, as stated above, the first branch target address information register b-1 invalidates the branch target address information of the branching instruction 02 which is no longer being used and buffers the address information of the branch target instruction
 10 41 of the newly read branching instruction 04.

Until the fetch request (P stage) of branch target instructions 11 and 12 are executed in cycle 4, in cycles 2 and 3 the fetch requests (P stage) of the instructions 03, 04 and instructions 05, 06 which follow branching
 15 instruction 02 are executed in every cycle. In cycles 5, 6 which are executed after the fetch requests of branch target instructions 11 and 12 (P stage), the fetch request of instructions 07 and 08 which follow 06 and the fetch requests of instructions 13 and 14 which follow branch
 20 target instructions 11 and 12 are executed alternately.

In this case, the instruction sequence which follows branch target instruction 11 is buffered in the empty instruction buffer e-2. However, even though the instruction buffer e-2 is empty, if the branching
 25 possibility level of branching instruction 02 is low, it is not necessary to store the branch target instruction sequence 11-16 of branching instruction 02 in instruction

buffer e-2 simply because the branch target address information of branching instruction 02 is stored in the first branch target address information register b-1

In cycle 5, branching instruction 02 proceeds to D stage, for example, if it is predicted that branching instruction 02 will branch according to the hint bit added on to branching instruction 02, the branch target instruction sequence 11, 12 read to instruction buffer e-2 is supplied to D stage in the following cycle, instead of instruction sequence 03-06 which follow instruction 02 buffered in instruction buffer e-1. However in the case of the instruction sequence in Figure 5, because the branch target instruction sequences 11 and 12 have not yet been read to the instruction buffer e-2 at the time when cycle 6 begins, the branch target instruction sequences 11 and 12 are supplied to D stage from the next cycle 7.

In cycle 6, branching instruction 12 is read from the instruction store 11 (C stage), the branching instruction detection portion 14 detects that there is a branching instruction and the address information of the branch target instruction 21 of branching instruction 12 is buffered in the second branch target address information register b-2. At this time, the two instruction buffers e-1 and e-2 are being used so that they cannot buffer a new branch target instruction sequence and the address information of the second branch target address information register b-2 is buffered until either of the instruction

buffers e-1 or e-2 is invalidated and an empty space is generated.

At this time the constitution according to this embodiment is in its the most characteristic state. In other words, the instruction sequence 01-08 which are being processed are stored in the instruction buffer e-1 using the fetch address register d-1, the branch target instruction sequences 11-16 of branching instruction 02 are stored in the instruction buffer e-2 using the fetch address register d-2, the branch target address information of the next branching instruction 04 of the instruction sequences 01-08 which are being processed are stored in the first branch target address information register b-1, and the branch target address information of the next branching instruction 12 of branching instruction sequences 11-16 are stored in the second branch target address information register b-2. The system waits for the result of the execution E stage of the branching instruction 02 in cycle 6.

In cycle 6, the decoded branching instruction 02 proceeds to E stage, and it is assessed whether or no there is branching. According to the route (1) in Figure 4, when it is determined that there is branching to instruction 11, in order to be able to newly read branch target instructions, fetch address register d-1 and instruction buffer e-1 which relate to instruction sequences 03-08 which follow instruction 02 are invalidated

and, furthermore, the first branch target address information register b-1 which buffers the branch target address information of the branching instruction 04 is invalidated. Then, the address information of the branch target instruction 21 of branching instruction 12 buffered in the second branch target address information register b-2 is sent to the first branch target address information register b-1.

Figure 7 is an explanatory figure showing the contents of the instruction buffers etc when cycle 6 has finished. In cycle 6, because it has been determined that the branching instruction 02 has branched to instruction 11, the instruction sequence 03-06 which follow instruction 02 buffered in instruction buffer e-1 are invalidated. Furthermore, as a result of the branch target address (21) which is generated from the data of the first branch target address information register b-1 being stored in fetch address register d-1, it becomes possible after this to store in instruction buffer e-1 the following instruction sequence 21-28 from instruction 21.

In addition, as stated above, the address information of branch target instruction 21 of branching instruction 12 buffered in the second branch target address information register b-2 is sent to the first branch target address information register b-1. Then, in the following cycle, the address information of branch target instruction 51 of the next branching instruction 14 inside the instruction

sequences 11-16 which are being processed are buffered in the first branch target address information register b-1, and the address information of branch target instruction 31 of the branching instruction 22 inside the branch target instruction sequence 21-28 are buffered in the second branch target address information register b-2.

To return to Figure 5, in the next cycle 7, the branch target generating portion 16 calculates branch target addresses (21) from the branch target address information of the branching instruction 12 buffered in the first branch target address information register b-1, and the instruction reading request portion 17 executes the fetch requests of instruction sequences 21 and 22. Then, the address of fetch address register d-1 is incremented, and the address (23) following instructions 21 and 22 is buffered in fetch address register d-1. In addition, after the buffered branch target address information has been sent to the branch target address generating portion 16, the first branch target address information register b-1 is invalidated.

In cycle 8, instruction 11 is executed (E stage) by the instruction execution portion 22. The E stage of this instruction 11 is performed delayed by one cycle from the E stage of instruction 02. This is because the P stage in which the fetching of the instruction 11 begins was delayed, and at the time of cycle 7 the transfer to the E stage of instruction 11 did not take place on time. However, if the

E stage of branching instruction 02 is delayed because of the preceding instruction sequence, it is possible to perform a transfer to the E stage of the branch target instruction 11 at the next cycle of the E stage of branching
5 instruction 02. In this case, no confusion at all is produced in the pipeline processing.

In cycle 8, the branch target address information of branching instruction 14 is stored in the branch target address information register b-1, and branching
10 instruction 12 proceeds to stage D. If it is predicted that branching instruction 12 will branch according to the hint bit added on to branching instruction 12, following the route (1) in Figure 4, the branch target instruction sequences 21, 22 buffered in instruction buffer e-1 will
15 be transferred to stage D from the following cycle, instead of instruction sequence 13-14 which follow instruction 12 buffered in instruction buffer e-2. However in the case of the instruction sequence in Figure 5, because the branch target instruction sequences 21 and 22 have not yet been
20 read to the instruction buffer e-2 at the time when cycle 9 begins, the branch target instruction sequences 21 and 22 are supplied to stage D from the next cycle 10.

In cycle 9, branching instruction 22 is read from the instruction store 11, and the branching instruction
25 detection portion 14 detects that there is a branching instruction and the branch target address information of the branching instruction 22 is buffered in the second

branch target address information register b-2. Here, the decoded branching instruction 12 proceeds to stage E, and it is assessed whether there is branching. In the example here, it is determined that there has been branching to instruction 21 so that the branch target address information of the branching instruction 14 buffered in the first branch target address information register b-1 is invalidated. Then, the branch target address information of branching instruction 22 is sent from branch target address information register b-2 to branch target address information register b-1 and buffered, and fetch address register d-2 which is related to instruction sequence 13-16 which follow instruction 12 and instruction buffer e-2 are invalidated.

Figure 8 is an explanatory figure showing the contents of the instruction buffers etc when cycle 9 has finished. In cycle 9, because it has been determined that the branching instruction 12 has branched to instruction 21, the instruction sequence 13-14 which follow instruction 12 buffered in instruction buffer e-2 are invalidated. Furthermore, as a result of the branch target address (31) which is generated from the data of the first branch target address information register b-1 being stored in fetch address register d-2, it becomes possible after this to store in instruction buffer e-2 the following instruction sequence 32-34 from instruction 31.

At this time, the address information of branch target

instruction 31 of branching instruction 22 buffered in the second branch target address information register b-2 is sent to the first branch target address information register b-1. Then, in the following cycle, the branch target address information of the next branching instruction 24 inside the instruction sequence 21-28 which are being processed is buffered in the first branch target address information register b-1, and the branch target address information of branching instruction 32 inside the branch target instruction sequence 31-34 is buffered in the second branch target address information register b-2.

To return to Figure 5, in the next cycle 10, the branch target generating portion 16 calculates branch target addresses from the branch target address information of the branching instruction 22. Then the instruction reading request portion 17 executes the fetch requests of instruction sequence 31 and 32. After this, the processing is generally as described above but in cycle 12 the branching instruction 22 proceeds to stage E and it is determined that branching is not occurring so that the instruction 31 and 32 buffered in instruction buffer e-2 are invalidated and the pipeline processing of instruction sequences 23-28 is preformed in cycles 13-20.

In order to perform pipeline processing at high speed, as stated above, it is necessary to continue the execution stage (E stage). In the constitution of the information processing device according to the present embodiment, when

it has been predicted that a branching instruction will branch and the branching instruction branches as predicted, usually since an instruction fetch was performed 10 well before that branching instruction so that there is no E stage delay, in other words there is no penalty. On the other hand, if, contrary to the prediction, that branching instruction has not branched, after the E stage of the branching instruction the decoding stage (D stage) of the branch target instruction is performed so that the branching penalty 1 occurs.

However, if E stage of the branching instruction is performed early and the fetch request stage (P stage) of the branch target instruction is delayed, a branching penalty 1 occurs. In addition, if the first instruction read to instruction buffers e-1 or e-2 is a branching instruction, the E stage of the branch target instruction is delayed severely and the worse branching penalty 2 occurs.

In the same way, in the constitution of the information processing device according to the present embodiment, when it has been predicted that a branching instruction will not branch and the branching instruction does not branch as predicted, usually an instruction fetch was performed well prior to that branching instruction so that there is no penalty. On the other hand, if, contrary to the prediction, that branching instruction has in fact branched, after the E stage of the branching instruction the decoding stage

(D stage) of the branch target instruction is performed so that the branching penalty 1 occurs

However, if the first instruction read to the instruction buffers e-1 and e-2 is a branching instruction, E stage of the branch target instruction is severely delayed and the worse branching penalty 2 occurs.

In the case of the branching route (1) shown in Figure 5, the branching penalty generated in relation to the first branching by instruction 02 is, as shown in the figure, the cycle time period 1 in cycle 7, the branching penalty generated in relation to the second branching by instruction 12 is, as shown in the figure, the cycle time period 1 in cycle 10 and the branching penalty generated in relation to the third branching by instruction 22 is, as shown in the figure, the cycle time period 1 in cycle 13.

Figure 9 shows the timing chart for the instruction route (2) shown in Figure 4, and branching occurs at branching instruction 02 but does not occur at branching instruction 12. The branching at branching instruction 02 is the same as at branching route (1), the process when branching does not occur at branching instruction 12 is the same as the process when branching does not occur at branching instruction 22 of the branching route (1). In other words, in Figure 9, if it has been determined that the branching instruction 12 does not branch at the execution stage (E stage) of cycle 9, the branch target

instruction sequences 21 and 22 read to the instruction buffer e-1 are invalidated and the following instruction sequence 13-16 are executed.

In the case of route (2), in the same way as in route (1), the branching penalty generated in relation to the first branching by instruction 02 is the cycle time period 1 in cycle 7 and the branching penalty generated in relation to the second branching by instruction 12 is the cycle time period 1 in cycle 10, while the branching penalty generated in relation to the third branching by instruction 14 is the cycle time period 1 in cycle 13.

Figure 10 shows the timing chart for the instruction route (3) shown in Figure 4, and branching does not occur at branching instruction 02 but does occur at branching instruction 04. The process in which branching does not occur at branching instruction 02 is the same as the process when branching does not occur at branching instruction 22 of the branching route (1), and the process when branching does occur at branching instruction 04 is the same as the process when branching does occur at branching instruction 02 of the branching route (1).

In the case of branching route (3), in the same way as in branching routes (1) and (2), the branching penalty generated in relation to the first branching by instruction 02 is the cycle time period 1 in cycle 7 and the branching penalty generated in relation to the second branching by instruction 04 is the cycle time period 1 in cycle 10, while

the branching penalty generated in relation to the third branching by instruction 42 is the cycle time period 1 in cycle 13.

Figure 11 is an explanatory figure showing the contents of the instruction buffers etc when cycle 6 has finished, for branching route (3) in Figure 10. In cycle 6, because it has been determined that the branching instruction 02 has not branched to instruction 11, the instruction sequence 11 and 12 buffered in instruction buffer e-2 are invalidated. Then, as a result of the branch target address (41) which is generated from the data of the first branch target address information register b-1 being stored in the fetch address register d-2, it becomes possible after this to store in instruction buffer e-2 the following instruction sequences from instruction 41.

In addition, the address information of the branch target instruction 21 of branching instruction 12 buffered in the second branch target address information register b-2 is invalidated and in the following cycle the address information of the branch target instruction 61 of the branching instruction 42 is buffered in the second branch target address information register b-2.

Figure 12 shows the timing chart for the instruction route (4) shown in Figure 4, and branching does not occur at branching instruction 02 and branching instruction 04. The non-occurrence of branching at branching instruction 02 is the same as in branching route (3), and the process

in which branching does not occur at branching instruction 04 is the same as the process when branching does not occur at branching instruction 22 of the branching route (1).

In the case of branching route (4), the branching penalty generated in relation to the first branching by instruction 02 is the cycle time period 1 in cycle 7 and the branching penalty generated in relation to the second branching by instruction 04 is the cycle time period 1 in cycle 9.

It is therefore apparent that this embodiment of the information processing device according to the present invention has a branching instruction detection portion 14 which detects whether a branching instruction is present inside the branching instruction sequence read from the instruction store 11, so that it is possible to detect a branching instruction from inside the read instruction sequence, before the instruction buffered inside the buffer instruction portion 12 is decoded.

In addition, when an instruction sequence comprising a branching instruction is being processed, it is advantageous to provide at least the first and second instruction buffers e-1 and e-2 which store the instruction sequence which is being processed and the first branching instruction sequence, so that the hardware of the instruction buffering portion 12 which stores the branch target instruction sequence can be minimized.

In addition, the branch target address information

of the next branching instruction inside the instruction sequence which is being processed and the branch target address information of the next branching instruction inside the first branch target instruction sequence are
5 stored in the first and second branch target address registers b-1 and b-2, so that, whether the system is in the branching state or in the non-branching state by processing the branching instruction, it is possible to read the branch target instruction sequence immediately
10 by this stored branch target address information, and the confusion in the pipeline processing due to consecutive branching instructions can be reduced.

Furthermore, in the present embodiment explanation is given for the case in which there are respectively two
15 instruction buffers, e-1 and e-2, and two branching instruction address registers b-1 and b-2, but there is no limitation to two, and three or more of such components is also possible.

In the present invention as described above, if it
20 is detected, before the instruction read from the instruction store is stored in the instruction buffer, that a branching instruction is present the branching address information of the detected branching instruction is stored. Therefore, it is possible to limit the increase in the
25 hardware of the instruction buffer etc. and reduce the confusion in the pipeline processing due to consecutive branching instructions.

[Second Embodiment]

Figure 14 is a timing diagram for the information processing device according to the second embodiment of the present invention. The information processing device shown in Figure 14 is a microprocessor and it has a chip-mounted CPU40, a cache memory unit 50 and a memory bus access portion 60. To the left of the memory bus access portion 60 is outside the chip and the main memory 64 is connected via the external memory bus 62.

The CPU 40 comprises an instruction decoder and execution portion 49 which decodes instructions and executes those instructions. The CPU 40 shown in Figure 14 comprises dual-instruction-fetch-type instruction fetch portions 410, 411 which fetch both branching instruction sequential side and branching instruction target side instructions at the same time. Furthermore, CPU 40 has instruction buffers 470, 471 which store instructions which have been fetched both on the sequential side and on the target side. Instructions selected by the selector 48 from among the instructions in the aforementioned instruction buffers are supplied to the instruction decoder 49. The selection by the selector 48 is made in accordance with the branching instruction branching prediction signals S430, S431 mentioned below.

An instruction which has been decoded by the instruction decoder is executed by the instruction execution portion 49 and the effects of the execution are

written to specified registers etc. (not shown). The instruction decoder and instruction execution portion 49 supplies the branch target address information S12 of the branching instruction to the branching side address generating portion 46. The branching side address generating portion 46 generates a branch target address A10 in accordance with that branch target address information S12 and supplies it to the branch target address buffer 45. The branch target address buffer 45 buffers this branch target address, which is a supplied target side instruction address, for later instruction fetches. Furthermore, sequential side address buffer 44 increments, generates and buffers sequential side instruction addresses.

Instruction fetch portions 410, 411 respectively comprise selector portions 420 and 421. Sequential side addresses A1 from the sequential side address buffer 44, target side branch target addresses A2 from the branch target address buffer 45 and addresses A3 which have been generated as a result of instruction execution operations from the instruction execution portion 49 are respectively supplied to the address selector portions 420, 421 and addresses selected from among these addresses are supplied to the cache memory unit 50 together with instruction fetch requests S20. The instruction fetch portions 410, 411 become, depending on the branching determining signals S10 supplied by the instruction execution portion 49, either

sequential side instruction buffering portions, on the one hand, or target side instruction fetch portions, on the other. In addition, depending on the branching determining signals S10, classification of either a prefetch at a stage
5 in which branching has not yet been determined or as a fetch after branching has been determined, is added on to the instruction request S20 and provided to the cache memory unit 50.

The cache memory unit 50 comprises the cache memory
10 unit 52 and the cache controllers 54, 56. The cache controllers 54, 56 fetches instructions from the cache memory 52 or the main memory 64 depending on the fetch request S20 from the instruction fetch portions 410, 411. Accordingly, the cache memory unit 50 becomes a 2 port unit
15 which can receive both sequential side and target side instruction fetch requests at the same time. The cache controller 54, 56 allocates addresses AD to the cache memory and fetches instructions. Then, the hit/miss signal which indicates whether there has been a cache hit or a cache
20 miss with those instruction fetches is transmitted back to the respective controllers 54, 56 from the cache memory 52.

When a cache hit has occurred as a result of an instruction fetched from a cache memory in accordance with
25 the fetch request S20, each cache controller 54, 56 supplies that fetched instruction to the corresponding instruction buffer 470, 471 and stores it. When there has been a cache

miss, the cache controllers 54, 56 execute, in accordance with an algorithm mentioned later, a memory bus access request to the memory bus access portion 60 in order to fetch instructions from the main memory 64. However, in
5 this embodiment, this memory bus access is limited to some extent at the stage in which branching has not yet been determined.

The memory bus access portion 60 is connected to the main memory 64 via the external memory bus 62, and the memory
10 bus access portion 60 controls the memory bus 62 and performs memory bus accesses in accordance with the fetch requests to the main memory 64 from the cache controllers 54, 56. The instructions fetched from the main memory 64 are respectively supplied to the corresponding cache
15 controllers 54, 56 and are stored both in the corresponding instruction buffers 470, 471 and also in the cache memory 52.

The cache controller 54, 56 supplies to the corresponding address selector portions 420, 421 a
20 completion indicating signal S22 relating to the fact that, as a function of the fetch request signal S20, an instruction has been fetched from the cache memory 52, an instruction has been fetched from the main memory 64 by accessing the memory bus, or the instruction fetch has been terminated.

25 The information processing device in Figure 14 comprises a branching prediction portion 430, 431 inside the CPU 40. In accordance with branching prediction bits

S30, S32 of instruction codes stored in the instruction buffer, this branching prediction portion 430, 431 executes the branching predictions of those fetched branching instructions and supplies the branching prediction information S430, S431 to the appropriate address selector portions 420, 421. The address selector portions 420, 421 add, to the fetch request signals S20, that branching prediction information, a fetch destination address and an information indicating whether branching has been determined, and supply the signals S20 to the cache controller 54,56.

The information processing device shown in Figure 14 is a dual instruction fetch type and performs both sequential side instruction sequence fetches and target side instruction sequence fetches, and supplies the fetched instructions to the instruction buffers 470,471. Such a dual instruction fetch is performed, in the stage prior to the determination of branching via the branching instruction execution by the instruction execution portion 49, and those prefetched sequential side and target side instruction sequences are stored in instruction buffers 470, 471. Accordingly, whichever direction branching is determined as a result of the branching instruction being executed, the instruction decoding and execution stages after the instruction has been determined can be preformed without confusing the pipeline cycles.

Furthermore, the information processing device shown

in Figure 14 performs branching predictions for the fetched instructions by the branching prediction portions 430, 431 and, in accordance with the results S430, S431, the instruction decoder 49 decodes an instruction from one of the instruction buffers 470, 471. By decoding the instruction in accordance with the branching prediction before a branching instruction has been determined, it is possible to minimize confusion in the pipeline processing cycles at the time when branching is determined.

The cache controller 54, 56 generally fetches an instruction from the cache memory 52 in response to the fetch request, and when a cache hit has occurred, the cache controller stores that fetched instruction in an instruction buffer, and when a cache miss has occurred, the cache controller sends a memory bus access request to the memory bus access portion 60 and fetches an instruction from the main memory 64.

However, while the data bus inside the cache memory unit 50 is a high speed bus, the external memory bus 62 operates at a low frequency and has a narrow bus width. Accordingly, when frequent memory bus accesses are made, the traffic to the memory bus 62 increases, and a memory bus access becomes slower. Accordingly, when the frequency of access to the external memory bus 62 is increased, for example when it has become necessary to fetch from the main memory instructions which have suddenly become necessary, there is the problem that this memory bus access takes time.

000260" E5839350

As stated later, when branching is not determined, the cache controller 54, 56 according to the present embodiment does not perform a memory bus access after a cachemiss has occurred, and terminates instruction fetches, 5 either according to requirements or completely.

In the first control example, in the case of an instruction which is not in the predicted direction, no memory bus access after the cache miss is performed and the instruction fetch is terminated. In the case of an 10 instruction which is not in the predicted direction, since it is highly probable that an instruction fetch of such an instruction will be futile at the time branching has not been determined later, it is probably best not to perform a memory bus access for such an instruction. However, in 15 the case of an instruction which is in the predicted direction, a bus access is made after a cache miss.

In the second control example, if the predicted branching direction is the sequential side and a cache miss has occurred with respect to the target side instruction, 20 that memory bus access is not performed and the memory fetch is terminated. However, if the predicted branching direction is the target side and a cache miss has occurred with respect to the sequential side, even if the instruction is on a different side from the predicted branching 25 direction, the memory bus access is performed and the instruction fetch is completed. The reason for this is that when a cache miss occurs and a memory bus access is made,

that instruction and the following address instruction are lumped together and fetched from the cache memory 52 so that the probability of the sequential side instruction sequence making a cache miss is low. Accordingly, even if
5 such low frequency bus access is permitted, there is little possibility of the increase in the traffic on the memory bus 62. In the second control example, a memory bus access after a cache miss is permitted for an instruction which is in the predicted branching direction.

10 In the third control example, storage in the instruction buffer takes place only if a cache hit has occurred during the period when branching has not yet been determined, and if a cache miss is made a memory bus access is not performed and the instruction fetch is terminated,
15 so that a memory bus access for an instruction for which a cache miss has been made can be preformed after a branching instruction has been determined. In this case, as long as the instruction fetched earlier is stored in the cache memory, the dual instruction fetch technique can be used
20 to prefetch an instruction from either side and store them in the instruction buffer. Then, because a memory bus access is made only for the instruction in the branching direction which is actually being used, after the branching has been determined, it is possible to reduce the frequency of access
25 to the memory bus.

Figure 15 is a block diagram showing the cache controller. As stated above, the fetch request S20B from

the CPU40 is provided together with the fetch address S20A and the branching prediction information S20C. The address S20A is provided to the cache memory 52 and buffered in the bus access address buffering portion 72. In addition,
 5 the fetch request signal S20A and the branching prediction information S20C are supplied to the bus access determination portion 70 for assessing whether a bus access is necessary.

The bus access determination portion 70 assesses
 10 whether a memory bus access is being requested by reference to the cache hit assessment result due to the cache hit/miss signal CHM from the cache memory 52, the branching prediction information S20C and by reference to whether the present status is a sequential side or target side.
 15 In addition, the bus access determination portion 70 supplies that assessment result to the bus access controller 74 as a bus access request signal S71, and supplies a signal S70 indicating that a bus access is not necessary to the completion determination portion 78.

20 If a memory bus access is assessed as being necessary in the above assessment, the bus access controller 74 transmits, in accordance with the bus access request signal S71 above, a bus access request signal S76 to the memory bus access portion 60, outputs the control signal S75 to
 25 the bus access address buffering portion 72 and makes the buffered fetch address output. In addition if a memory bus access is assessed as being unnecessary in the above

assessment, the bus access controller 74 does not perform a memory bus access. This assessment is carried out using the algorithm in the control examples 1,2 and 3.

When the data from the main memory 64 is transmitted
5 back in response to a memory bus access, the bus access controller 74 receives the data availability signal S77 from the memory bus access portion 60 and in accordance with this it supplies the bus access completion signal S74 to the completion determination portion 78. The completion
10 determination portion 78 sends to the instruction fetch portion in CPU, in accordance with the bus access completion signal S74 or the signal S70 indicating that a bus access is unnecessary, a completion indicating signal S22 which indicates whether an instruction has been fetched from the
15 cache memory 52, an instruction fetch has been terminated or a fetch has been made from the main memory by a memory bus access.

If a fetch has been made from the main memory, storage in both the cache memory and in the instruction buffer is
20 carried out via the cache controller.

The algorithm which does not perform a memory bus access in the first, second and third control examples will be explained below.

Figure 16 is a table showing the instruction fetching
25 operations in the first control example of the controller above. Explanation will be given of the operations along the table. In the first controller:

(1) When the branching direction of the branching instruction has not been determined,

(1-1) If the branching direction predicted by the branching prediction portion is the target side:

5 (1) for the sequential side instruction fetch, if an instruction cache miss, a memory bus access is not performed, the instruction fetch is terminated and a memory bus access is not made.

10 (2) for the target side instruction fetch, if an instruction cache miss, a memory bus access is made and the instruction fetch is completed.

(1-2) If the branching direction predicted for the execution of the branching instruction is the sequential side:

15 (1) for the target side instruction fetch, if an instruction cache miss, a memory bus access is not performed, the instruction fetch is terminated and a memory bus access is not made.

20 (2) for the sequential side instruction fetch, if an instruction cache miss, a memory bus access is made and the instruction fetch is completed.

(2) When the branching direction of the branching instruction has been determined,

25 Instruction fetches are made only on the side (sequential side or target side) on which branching has been predicted. In this case, if a cache miss is made, a memory bus access is made and the fetch is completed.

As stated above, in the first control example, in the period when the branching direction has not yet been determined, it is permitted to perform a memory bus access after a cache miss only for an instruction fetch in the predicted branching direction, and in the case of an instruction fetch which is not in the predicted branching direction, a memory bus access after a cache miss is prohibited and bus accesses for instruction fetches which have a high probability of being futile are not performed.

When a cache hit is made in either of the above cases, a fetched instruction is stored in the instruction buffer and the instruction fetch is completed.

In addition, the address selector 420, 421 inside the instruction fetch portions 410, 411 reissue an instruction fetch request for an instruction whose instruction fetch have not been completed and whose direction is the branching direction determined by the branching determining signal S10. If a cache miss occurs at this time, a memory bus access is performed and the necessary instruction fetch is performed. At that time, the instruction sequence following this is stored in the cache memory 52.

Figure 17 is a table showing the instruction fetching operations in the second control example which is an improved version of the first control example. Explanation will be given of the operations along the table. In the second control example:

(1) When the branching direction of the branching

instruction has not been determined,

(1-1) If the branching direction predicted by the branching prediction portion is the target side;

(1) for sequential side instruction fetch, if an
5 instruction cache miss, a memory bus access is performed, and the instruction fetch is completed.

(2) for a target side instruction fetch, if an instruction cache miss, a memory bus access is made and the instruction fetch is completed.

10 (1-2) If the branching direction predicted for the execution of the branching instruction is the sequential side;

(1) for target side instruction fetch, if an instruction cache miss, a memory bus access is not performed, the
15 instruction fetch is terminated and a memory bus access is not made.

(2) for the sequential side instruction fetch, if an instruction cache miss, a memory bus access is made and the instruction fetch is completed.

20 (2) When the branching direction of the branching instruction has been determined,

Instruction fetches are made only on the side (sequential side or target side) on which branching has been predicted.

In this case, if a cache miss is made, a memory bus access
25 is made and the fetch is completed.

The second control differs from the first control in that if the predicted branching direction is the target

side and a cache miss is generated with respect to the sequential side instruction fetch, there is an instruction on the side other than the predicted branching direction but a memory bus access is made and an instruction fetch
 5 is completed. Because, the probability of such a case is extremely low, they rarely occur and therefore even if memory bus access is permitted the traffic on the memory access bus is not increased.

Figure 18 is a table showing the instruction fetching
 10 operations in the third control example. Explanation will be given of the operations along the table. In the third control example:

(1) When the branching direction of the branching instruction has not been determined,

15 (1-1) If the branching direction predicted by the branching prediction portion is the target side;

(1) for sequential side instruction fetch, if an instruction cache miss, a memory bus access is not performed, the instruction fetch is terminated, and a memory bus access
 20 is not made.

(2) for a target side instruction fetch, if an instruction cache miss, a memory bus access is not made, the instruction fetch is terminated and a memory bus access is not made.

(1-2) If the branching direction predicted for the
 25 execution of the branching instruction is the sequential side;

(1) for target side instruction fetch, if an instruction

cache miss, a memory bus access is not performed, the instruction fetch is terminated and a memory bus access is not made.

(2) for the sequential side instruction fetch, if an
5 instruction cache miss, a memory bus access is not made, the instruction fetch is terminated and a memory bus access is not made.

(2) When the branching direction of the branching instruction has been determined,

10 Instruction fetches are made only on the side (sequential side or target side) on which branching has been predicted. In this case, even if a cache miss is made, a memory bus access is made, an instruction is fetched from the main memory and the instruction fetch is completed.

15 In the period when a branching instruction is not executed and branching has not yet been determined, the third control example completely prohibits all memory bus accesses. And it permits memory bus accesses only with respect to instructions for which the branching direction
20 has been determined. If branching has not yet been determined, it is possible that an instruction fetch by a memory bus access will be futile so that such a memory bus access is prohibited and the traffic on the memory bus traffic is reduced. Because instructions for which
25 branching has been determined are stored in advance in the cache memory, there is not such a high probability that a cache miss will actually be generated. Accordingly,

simply by making prefetches only from the cache memory and also storing instruction sequences from both the sequential and target sides in the memory buffer, it is possible to execute instructions without very much confusion in the
5 actual pipeline operations.

Finally, a method of reducing memory accesses other than those above will be explained with respect to the fourth control example. Figure 19 is a diagram showing instruction fetch operations in the fourth control example. In the
10 fourth embodiment of the controller:

(1) When the branching direction of the branching instruction has not been determined,

(1-1) If the branching direction predicted by the branching prediction portion is the target side:

15 (1) if a sequential side instruction fetch makes an instruction cache miss, a memory bus access is not performed, the instruction fetch is terminated, and a memory bus access is not made.

(2) On the other hand, if a target side instruction fetch
20 makes an instruction cache miss, a memory bus access is made and the instruction fetch is completed.

(1-2) If the branching direction predicted for the execution of the branching instruction is the sequential side:

25 (1) if target side instruction fetch makes an instruction cache miss, a memory bus access is performed and the instruction fetch is completed.

(2) if a sequential side instruction also makes an instruction cache miss, a memory bus access is made and the instruction fetch is completed.

(2) When the branching direction of the branching
5 instruction has been determined,

instruction fetches are made only on the side
(sequential side or target side) on which branching has
been predicted. In this case, an instruction fetch which
has performed a memory bus access with a cache miss is
10 completed.

In the case of the fourth control example, if a
branching instruction has not yet been determined, and at
least the predicted branching direction is the target side
and an instruction cache miss is made on the sequential
15 side, a memory bus access is not made. By this means, it
is possible to reduce the frequency only of memory bus
accesses in such a situation.

In the same way as in the aforementioned fourth control
example, even if an optional instruction fetch for a memory
20 bus access is prohibited when branching has not been
determined, the frequency of memory bus accesses can be
reduced only in that situation. However, at the same time,
there are also cases in which it is not possible to make
instruction prefetches in the predicted branching
25 direction. It is preferable to give consideration to and
achieve a balance between the prohibition of memory buss
accesses and the failure of instruction prefetches.

With respect to the four control examples, operations of the second control example which, to a certain degree, achieve a balance between the prohibition of memory bus accesses and the failure of instruction prefetches will
5 be explained with reference to Figure 1. It is assumed as preconditions that a sequential side instruction fetch is made at Port 0, and that a target side instruction fetch is made at Port 1.

(1) When the branching direction of the branching
10 instruction has not been determined,

(1-1) If the branching direction predicted by the branching prediction portion 430, 431 is the target side, in the case of a sequential side instruction fetch, the instruction fetch portion 410 (Port 0) of the CPU40 supplies
15 an instruction fetch request S20 to the cache controller portion 54 (Port 0) inside the cache memory unit 50, and that instruction fetch request is passed on to instruction cache memory 52. A fetch address, information indicating whether branching has been determined yet and branching
20 prediction information and the like are added to this instruction fetch request.

If a cache miss is made in instruction cache memory 52, that signal CHM is returned to the cache controller 54, and cache controller 54 outputs a memory bus access
25 request to memory bus access portion 60. In response to this, the memory bus access portion 60 accesses the memory bus 62, reads an instruction from the main store 64, passes

it to the cache controller 54 and writes it to the memory cache 52. The aforementioned memory bus portion (60) also stores the instruction in the instruction buffer (0) 470 inside the CPU 40 and completes the instruction fetch. An
5 instruction fetch completion signal S22 is transmitted back to the instruction fetch portion 410.

Because cache misses in the case of sequential side instruction fetches are not so frequent, even if memory bus accesses are permitted in this case, the overall
10 efficiency of memory bus accesses is not reduced very much.

In case of a target side instruction fetch, an instruction fetch request from the instruction fetch portion 411 inside the CPU 40 is supplied to the cache controller 56 (Port 1) and this instruction fetch request
15 is passed on to the cache memory 52.

If an instruction cache miss is made in the instruction cache memory 52, the cache controller 56 (Port 1) outputs a memory bus access request to the memory bus access portion 60, the memory bus access portion 60 accesses the memory
20 bus 62, reads the instruction from the main store 64, passes it on to the cache controller 56 (Port 1) and writes it to the cache memory 52. The aforementioned memory bus access portion 60 also stores the instruction in the instruction buffer (1) 471 inside the CPU 40 and completes the
25 instruction fetch. Then, an instruction fetch completion signal S22 is transmitted back to the instruction fetch portion 411.

In this case, because an instruction having a predicted branching direction with a high probability of use makes a cache miss, the fact that a memory bus access is permitted, and the prefetch is completed prevents confusion in the pipeline operations after the branching.

(1-2) When the branching direction predicted by the branching prediction portion is the sequential side, in the case of a target side instruction fetch, an instruction fetch request from the instruction fetch portion 411 inside the CPU 40 is sent to the cache controller 56 (Port 1) and this instruction fetch request is passed on to the instruction cache memory.

Even if an instruction cache miss is made in the instruction cache memory 52, the cache controller 56 (Port 1) does not send a memory bus access request to the memory bus access portion 60. As a result, the memory bus access portion 60 does not make a memory bus access. Then, the cache controller 56 terminates the instruction fetch, and transmits back to the address selector portion 421 a signal indicating that the result of the instruction fetch was cancelled.

On the other hand, in the case of a sequential side instruction fetch, an instruction fetch request is sent from the instruction fetch portion 410 (Port 0) inside the CPU40 to the cache controller portion 54 (Port 0), and this instruction fetch request is passed on to instruction cache memory 52.

000269" 2389960

If a cache miss is made in instruction cache memory 52, cache controller 54 sends a memory bus access request to memory bus access portion 60, and the memory bus access portion 60 accesses the memory bus 62, reads an instruction from the main store 64 and returns it to the cache controller 54. The cache controller 54 writes this instruction to the cache memory 52. The instruction is also stored in the instruction buffer (0) 470 of the CPU 40 and the instruction fetch is completed.

(2) When the branching direction has been determined by the execution of a branching instruction,

The instruction buffering portion 420 and 421 makes instruction fetches only on the side (sequential side or target side) on which branching has been predicted by the execution of the branching instruction. At this time, if the determined branching direction is the sequential side, the instruction fetch portion 420 requests a bus access to the memory bus access portion 60 via the cache controller (Port 0). The memory bus access portion 60 reads the fetch requested instruction from the main store 64 and stores the instruction in the instruction buffer (0) 470 and the cache memory 52 via the cache controller 54, and completes the instruction. fetch

If the determined branching direction is the target side, the instruction fetch portion 411 requests a bus access to the memory bus access portion 60 via the cache controller (Port 0). The memory bus access portion 60 reads

the fetch requested instruction from the main store 64 and stores the instruction in the instruction buffer (1) 471 via the cache controller 56, and completes the instruction fetch. When the determined branching direction becomes the
5 target side, the target side takes the place of the sequential side, and the sequential side takes the place of the target side.

Figure 20 is a table showing specific pipeline operations when memory bus accesses have been limited
10 according to the first and second control examples. In this case, pipeline operations are shown, taking as examples the sequential side instruction sequence 01-09 and the target side instruction sequence 51-54 corresponding to branching instruction 03 which are given below the table
15 in Figure 20. In this case, the predicted branching side for branching instruction 03 does not branch. In other words, the sequential side direction has been predicted.

The pipeline operations are formed by the next stages.

P : an instruction fetch request stage : the CPU makes
20 a fetch request to the cache controller. At this stage, an instruction fetch request is made with an indication of whether it is a prefetch before branching is determined or a fetch after branching has been determined.

T : a fetch stage : a hit/miss assessment is performed
25 in the cache memory and preparations are made to fetch the instruction.

C : an instruction buffer stage : the instruction is

input into the instruction buffer.

D : a decoding stage : the instruction decoder decodes the instruction and generates a control signal.

E : an execution stage: the instruction is executed
5 in response to the decoding result control signal.

W : a writing stage : the result indicating that the instruction has been executed is written to a register.

M : cache miss : a cache miss is generated.

B : bus access buffering stage : in order to access
10 the memory bus, an address is buffered in the bus access address buffering portion.

R : bus access request stage : a read request is sent to the memory bus access portion. A bus access is performed and it is assumed that 18 cycles are required until the
15 instruction is read.

To return to Figure 20 for instruction 01, it is possible to fetch instructions from the cache memory by the instruction fetch request P of cycle 1 and the fetch stage T of cycle 2, and instructions are input into the
20 instruction buffer in cycle 3 (C Stage). Then, instructions are executed in the three cycles 5, 6 and 7 (E stage). After execution, the instruction execution result is written to each type of register (W stage).

Instruction 02 is also stored to the instruction buffer
25 by way of stages P, T and C. Then, at the next cycle 8 after completed the execution stage E of instruction 01, the instruction 02 which has been waiting at the decoding stage

D is executed (E stage), and the execution result is written to a register (W stage).

Instruction 03 is assessed as being a branching instruction by the branching prediction portion at the time of instruction buffer stage C, and the branching direction is predicted as being the sequential side. Accordingly, the prefetch of the target side instruction sequence 51, 52 and 53 are started from cycle 6.

As far as instructions 03-07, all the instructions make cache hits without any confusion in the pipeline cycles and the respective execution stages E are executed. Then, it is assumed that instructions 08-10 make cache misses (M stage). In addition, the target side instructions 51-53 also make cache misses (M stage).

In the case of instruction 08, since the branching of branching instruction 03 is not yet determined at the time of cycle 8, a request is made as an instruction prefetch for which branching has not yet been determined (P stage). A cache miss is made in cycle 10. But if, in the first or second controls, a sequential side instruction makes a cache miss at the time when sequential side branching is predicted, that memory bus access is permitted. Accordingly, the system goes to bus access buffering stage B in cycle 11, and goes to the bus access request stage R in cycle 12. Because it is assumed that bus access request stage R will require 18 cycles, the fetched instruction is stored in the instruction buffer and the instruction buffer stage

C is entered at cycle 30.

Along with the memory bus access of instruction 08, the following instructions are also fetched from the main memory and stored in the cache memory so that the instruction
5 buffer stage C after instruction 09 occurs following the stage C of instruction 08.

On the other hand, instruction 51 makes a cache miss at the time of cycle 8 but because the predicted branching direction is the sequential side, a memory bus access for
10 the target side instruction 51 is prohibited. In the same way, instructions 52, 53 are also prohibited. Therefore, in cycle 12 in which a memory bus access is made for instruction 08, the memory bus is empty and, therefore, it is possible to make memory bus accesses quickly, then
15 in cycle 32 instruction is executed (E stage).

Furthermore, instructions 11 and 12 go, after branching has been respectively determined, into the instruction fetch stage P so that even if a cache miss is made, the memory bus access is executed. However, in the
20 example in Figure 7, the instructions 11 and 12 are stored previously in the cache memory at the memory bus access of instruction 08 so that a cache miss does not occur normally.

In the example in Figure 20, the same operations occur
25 as in the first and second control examples. In other words, even if a cache miss has occurred for a prefetch for an instruction 08 at the time when branching has not yet been

determined, a memory bus access is permitted for the instruction 08 with the predicted branching direction.

In the third control example, a memory bus access after a cache miss relating to a prefetch for an instruction 08 at the time when branching has not yet been determined is prohibited. In this case, the instruction is fetched by a memory bus access after a cache miss in response to a repeated instruction fetch from the instruction fetch portion after branching has been determined. The memory bus access in that case is performed at high speed.

Figure 21 is a table showing specific pipeline operations for the example of conventional, unlimited memory bus access. The pipeline operations shown relate to the same instruction sequences as in Figure 20.

In this example, instruction 51 is not in the predicted branching direction but a memory bus access is permitted. Accordingly, the system goes into the bus access request stage R from cycle 10. This stage R requires 18 cycles so that even though instruction 08 makes a cache miss (M stage) at cycle 10, the memory bus is in the busy state and this memory bus access R waits until cycle 28. As a result, the execution E stage of instruction 08 is delayed until cycle 48.

In this way, compared with the conventional example, in this embodiment the memory bus access is limited at the stage when branching has not yet been determined so that it is possible to ensure that memory bus accesses are

efficiently made for instructions whose use is highly probable, enabling pipeline confusion to be minimized.

In the present invention, access to a main memory is appropriately restricted at the time when there has been
5 a cache miss relating to an instruction fetch when branching has not yet been determined so that it can be made more efficiently that an access to a main memory will be for an instruction in the predicted branching direction and/or for an instruction after branching has been determined.

10 The present invention is generally implemented as a microprocessor chip. However, it can be implemented as a plurality of chips set, or an information processor system.

15 The scope of protection of the present invention is not restricted to the embodiments above, but rather protection is claimed to an extent equivalent to the invention as defined in the scope of the patent claims.

What is claimed is

1. An information processing device which reads,
buffers, decodes and executes instructions from an
5 instruction store portion by pipeline processing,
comprising:

an instruction reading request portion which assigns
a read address to said instruction store portion;

an instruction buffering portion including a
10 plurality of instruction buffers which buffer instruction
sequences read from said instruction store portion;

an instruction execution unit which decodes and
executes instructions buffered by said instruction
buffering portion;

15 a branching instruction detection portion which
detects a branching instruction inside the instruction
sequence read from said instruction store portion; and

a branch target address information buffering portion
including a plurality of branch target address information
20 buffers which, when said branching instruction detection
portion has detected a branching instruction, buffer the
branch target address information for generating the branch
target address of said branching instruction;

wherein:

25 when said branching instruction detection portion has
detected a branching instruction, either the branch target
address information of the branching instruction is stored

in one of the plurality of branch target address information buffers, or the branch target instruction sequence of said branching instruction is stored in one of said plurality of instruction buffers in addition to the storing in said
5 branch target address information buffer.

2. An information processing device which reads, buffers, decodes and executes instructions from an instruction store portion by pipeline processing,
10 comprising:

an instruction reading request portion which assigns a read address to said instruction store portion;

an instruction buffering portion including a plurality of instruction buffers which buffer instruction
15 sequences read from said instruction store portion;

an instruction execution unit which decodes and executes instructions buffered by said instruction buffering portion;

a branching instruction detection portion which
20 detects a branching instruction inside the instruction sequence read from said instruction store portion; and

a branch target address information buffering portion including a plurality of branch target address information buffers which, when said branching instruction detection
25 portion has detected a branching instruction, buffer the branch target address information for generating the branch target address of said branching instruction;

wherein:

the first instruction sequence being processed is stored in either one of the first or second instruction buffer and when said branching instruction detection
5 portion detects a branching instruction inside said first branching instruction sequence, a second instruction sequence of the branch target is stored in the other one of the first or second instruction buffers in accordance with the branch target address information of said
10 branching instruction;

the branch target address information of the next branching instruction inside said first instruction sequence is stored in either one of the first or second branch target address information buffer; and

15 the branch target address information of the branching instruction inside said second instruction sequence is stored in the other one of said first or second branch target address information buffer.

20 3. The information processing device as claimed in Claim 2 wherein, in the state in which said first instruction sequence being processed is stored in either one of said first or second instruction buffer, the second instruction sequence of the branch target of the branching instruction
25 inside said first instruction sequence is stored in the other one of said first or second instruction buffers, the branch target address information of the next branching

instruction inside said first instruction sequence is stored in said first branch target address information buffer and the branch target address information of the branching instruction inside said second instruction
5 sequence is stored in said second branching address information buffer;

if the execution of the branching instruction inside said first instruction sequence has resulted in branching, said first instruction sequence and the branch target
10 address information of the next branching instruction inside said first instruction sequence are invalidated;

the third instruction sequence of the branch target of the branching instruction inside said second instruction sequence is stored in one of said first or second instruction
15 buffer, in accordance with the branch target address information which have been stored in the other one of said first or second branch target address information buffer; and

the branch target address information of the next
20 branching instruction inside said second instruction sequence is stored in one of the first or second branch target address information buffer, and the branch target address information of the branching instruction inside said third instruction sequence is stored in the other one
25 of said first or second branch target address information buffer.

4. The information processing device as claimed in Claim 2 wherein, in the state in which said first instruction sequence being processed is stored in either one of said first or second instruction buffer, the second instruction sequence of the one of the branch target of the branching instruction inside said first instruction sequence is stored in the other one of said first or second instruction buffer, the branch target address information of the next branching instruction inside said first instruction sequence is stored in said first branch target address information buffer and the branch target address information of the branching instruction inside said second instruction sequence is stored in said second branching address information buffer;

15 if the execution of the branching instruction inside said first instruction sequence has not resulted in branching, said second instruction sequence and the branch target address information of the branching instruction inside said second instruction sequence are invalidated;

20 the fourth instruction sequence of the branch target of the next branching instruction inside said first instruction sequence is stored in one of said first or second instruction buffer, in accordance with the branch target address information which have been stored in the other one of said first or second branch target address information buffer; and

25 the branch target address information of the next

branching instruction inside said first instruction sequence is stored again in one of said first or second branch target address information buffer, and the branching address information of the branching instruction inside
5 said fourth branching instruction sequence is stored in the other one of said first or second branch target address information buffer.

5. The information processing device as claimed in
10 Claim 1 wherein, in response to a single instruction read request from said instruction reading request portion, a plurality of consecutive instructions from said read address are read from said instruction store portion and buffered in said instruction buffering portion.

15 6. An information processing device which reads, buffers, decodes and executes instructions from an instruction store portion by pipeline processing, comprising:

20 an instruction reading request portion which assigns a read address to said instruction store portion;

an instruction buffering portion including a plurality of instruction buffers which buffer instruction sequences read from said store portion;

25 an instruction execution unit which decodes and executes instructions buffered by said instruction buffering portion;

000269 "E339950

a branching instruction detection portion which detects a branching instruction inside the instruction sequence read from said instruction store portion, and detects branching prediction information of the branching instruction;

a branch target address information buffering portion including a plurality of branch target address information buffers which, when said instruction detection portion has detected a branching instruction, buffer the branch target address information for generating the branch target address of said branching instruction;

wherein:

when said branching instruction detection portion has detected a branching instruction, either the branch target address information of the branching instruction is stored in one of said plurality of branch target address information buffers, or the branch target instruction sequence of said branching instruction is stored again in one of said plurality of instruction buffers in addition to the storing in said branch target address information buffer.

7. An information processing device as claimed in Claim 6 wherein, whether said branch target address information buffering portion buffers the branch target address information of said branching instruction is determined in accordance with the branching prediction

information of the branching instruction which is detected by said instruction detection portion.

8. The information processing device as claimed
5 in Claim 6 wherein, whether said instruction buffering portion fetches the branch target instruction sequence of said branching instruction is determined in accordance with the branching prediction information of the branching instruction which is detected by said instruction detection
10 portion.

9. The information processing device as claimed in Claim 6 wherein, if said branching instruction detection portion predicts with a prescribed high level of
15 probability that the branching instruction will not branch, said branch target address information buffering portion does not fetch the branch target instruction sequence of said branching instruction.

10. The information processing device as claimed in Claim 6 wherein, when said branch target address information buffering portion has buffered branch target address information of a first branching instruction, if said branching instruction detection portion has detected
20 a second branching instruction which has a greater possibility of branching than said first branching instruction, said branch target address information
25

buffering portion invalidates the branch target address information of said first branching instruction and buffers the branch target address information of said second branching instruction.

5

11. The information processing device as claimed in Claim 6 wherein, when the instruction buffer of said instruction buffering portion is empty, if a first branching instruction having a first branching possibility is detected by said branching instruction detection portion, a branch target instruction sequence of said first branching instruction is not fetched to said instruction buffering portion and said branch target address information buffering portion buffers the branch target address information of the first branching instruction, and if said branching instruction detection portion has detected a second branching instruction which has a second branching possibility which is higher than said first branching possibility, a branch target instruction sequence of said second branching instruction is fetched to said instruction buffering portion.

12. An information processing device comprising:
an instruction fetch portion which fetches both a sequential side instruction sequences and a target side instruction sequences of a branching instruction;
a cache controller which fetches instructions from

000260"E5899960

a cache memory or from a main memory in response to a fetch request from said instruction fetch portion;

a memory bus access portion which accesses said main memory;

5 an instruction buffer which buffers instructions which have been fetched; and

a branching prediction portion which, prior to an execution of a branching instruction, performs a branching prediction for the branching instruction which is stored
10 in said instruction buffer;

wherein, if the branching direction of said branching instruction is not yet determined, said cache controller performs a memory bus access to said main memory according to a branching direction predicted by the branching
15 prediction portion.

13. The information processing device as claimed in Claim 12 wherein, while the branching direction of said branching instruction is not yet determined, if the cache
20 controller has performed a cache miss with respect to an instruction in the predicted branching direction of said branching instruction, said cache controller performs the memory bus access to the main memory for an instruction fetch, and if said cache controller has performed a cache
25 miss with respect to an instruction which is not in the predicted branching direction, said cache controller does not perform the memory bus access and stops the instruction

fetch.

14. The information processing device as claimed in Claim 12 wherein, while the branching direction of said
5 branching instruction is not yet determined and the predicted branching direction of said branching instruction is the sequential side, in the event of said cache controller performing a cache miss with respect to said target side instruction, said cache controller does
10 not perform a memory bus access and stops the instruction fetch.

15. The information processing device as claimed in Claim 12 wherein, while the branching direction of said
15 branching instruction is not yet determined, said cache controller does not perform a memory bus access after a cache miss depending on the predicted branching direction of said branching instruction.

20 16. An information processing device, comprising:
an instruction fetch portion which fetches both a sequential side instruction sequences and a target side instruction sequences of a branching instruction;

a cache controller which fetches instructions from
25 a cache memory or from a main memory in response to a fetch request from said instruction fetch portion;

a memory bus access portion which accesses said main

memory;

an instruction buffer which buffers instructions which have been fetched; and

5 a branching prediction portion which, prior to an execution of a branching instruction, performs a branching prediction of the branching instruction which is stored in said instruction buffer;

10 wherein, if the branching direction of said branching instruction is not yet determined and said cache controller performs a cache miss with respect to an instruction fetch, said cache controller does not perform a memory bus access and stops the instruction fetch, and if said branching instruction has been determined and said cache controller performs a cache miss with respect to an instruction in
15 the determined branching direction, said cache controller performs a memory bus access.

17. The information processing device as claimed in Claim 16 wherein, if the branching direction of said
20 branching instruction is not yet determined, an instruction for which a cache hit has been made is prefetched and stored in said instruction buffer.

18. The information processing device as claimed
25 in Claim 16 wherein, instructions are selected from either said instruction sequential side or instruction target side in said instruction buffer depending on the branching

direction of the branching prediction portion, and decoded.

ABSTRACT

000260" E3899960
The present invention is defined in that an information processing device which reads, buffers, decodes and executes instructions from an instruction store
5 portion by pipeline processing comprises: an instruction reading request portion which assigns a read address to the instruction store portion; an instruction buffering portion including a plurality of instruction buffers which buffer an instruction sequence read from the instruction
10 store portion; an instruction execution unit which decodes and executes instructions buffered by the instruction buffering portion; a branching instruction detection portion which detects a branching instruction in the instruction sequence read from the instruction store
15 portion; and a branch target address information buffering portion including a plurality of branch target address information buffers which, when the branching instruction detection portion has detected a branching instruction, buffer the branch target address information for generating
20 the branch target address of the branching instruction; wherein, when the branching instruction detection portion has detected a branching instruction, either the branch target address information of the branching instruction is stored in one of the plurality of branch target address
25 information buffers, or the branch target instruction sequence of the branching instruction is stored in one of the plurality of instruction buffers in addition to the

storing in the branch target address information buffer.

000250 "E5B99960

FIG. 1

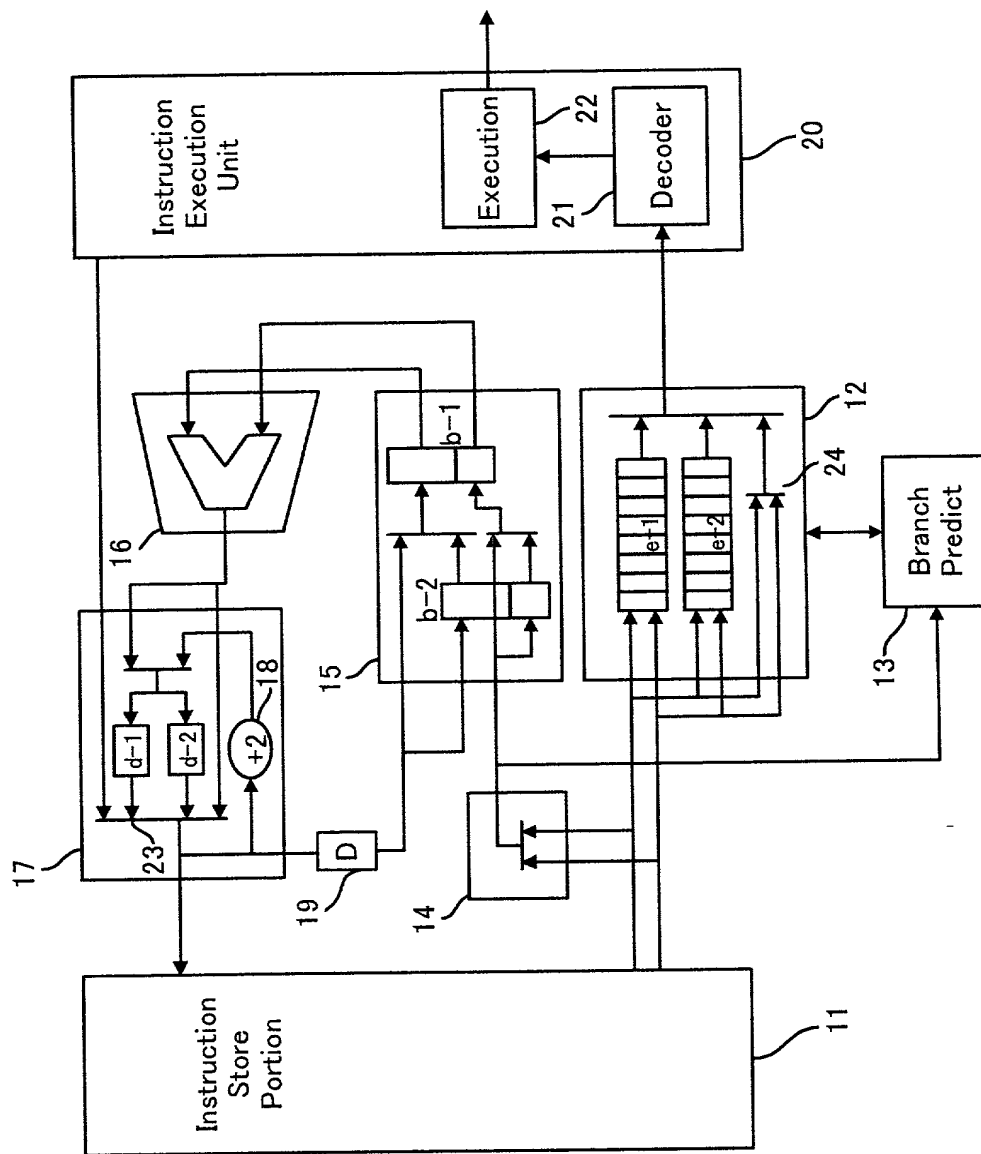


FIG. 2

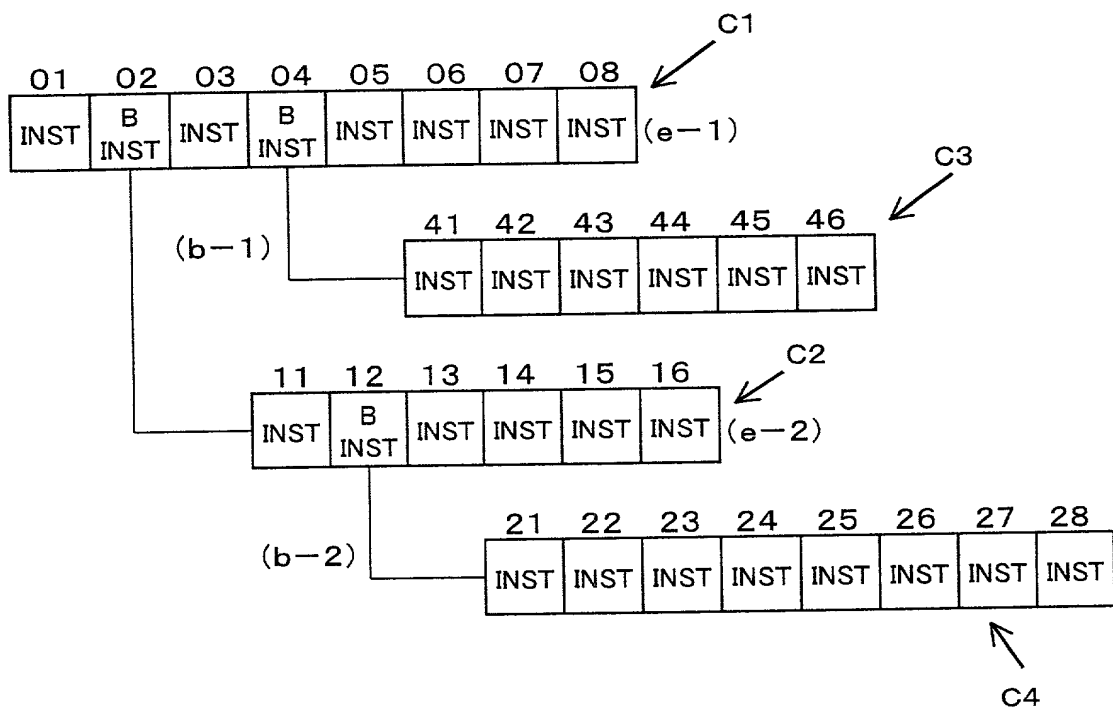


FIG. 3

Instruction Address	Instruction
01	Condition Determination Instruction
02	Condition Branching Instruction(branch to address 11)
03	Condition Determination Instruction
04	Condition Branching Instruction(branch to address 41)
05	Arithmetic Instruction
06	"
07	"
08	"
11	Condition Determination Instruction
12	Condition Branching Instruction(branch to address 21)
13	Condition Determination Instruction
14	Condition Branching Instruction(branch to address 51)
15	Arithmetic Instruction
16	"
21	Condition Determination Instruction
22	Condition Branching Instruction(branch to address 31)
23	Condition Determination Instruction
24	Condition Branching Instruction
25	Arithmetic Instruction
26	"
27	"
28	"
31	Condition Determination Instruction
32	Condition Branching Instruction
33	Condition Determination Instruction
34	Condition Branching Instruction
41	Condition Determination Instruction
42	Condition Branching Instruction(branch to address 61)
43	Arithmetic Instruction
44	"
45	"
46	"
51	Arithmetic Instruction
52	"
53	"
54	"
55	"
61	Arithmetic Instruction
62	"
63	"
64	"
65	"
66	"

FIG. 4

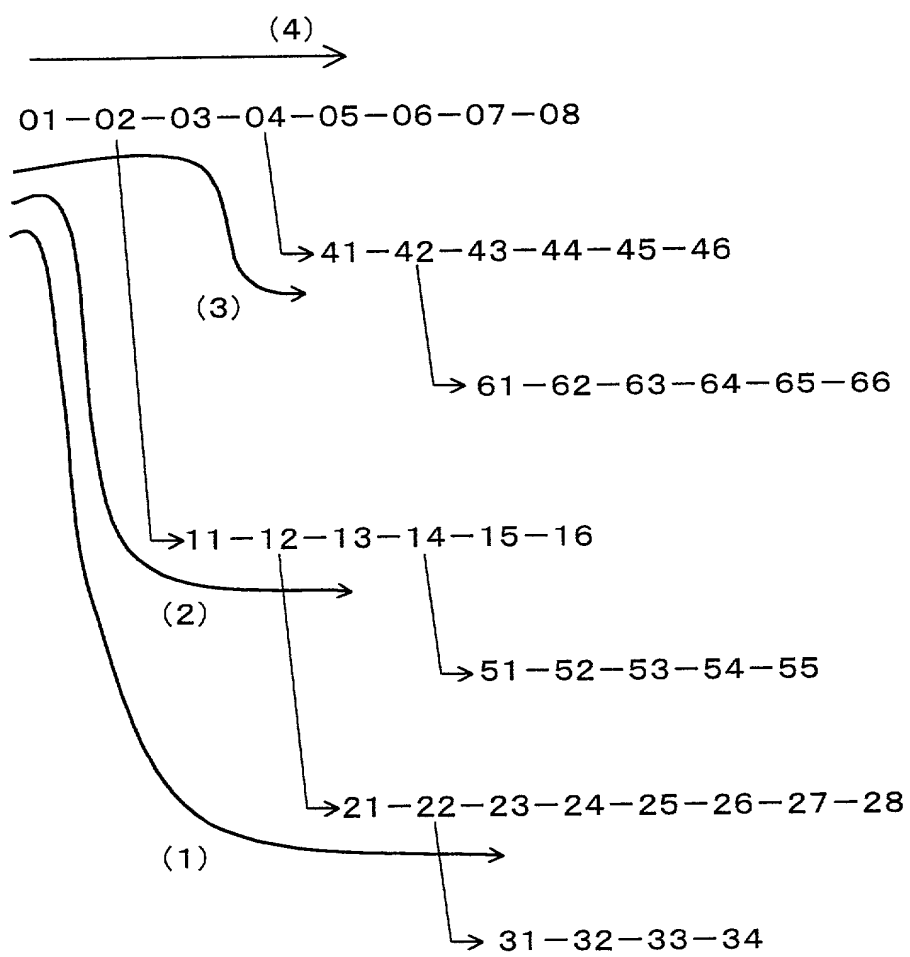


FIG. 5

Branching Route (1)

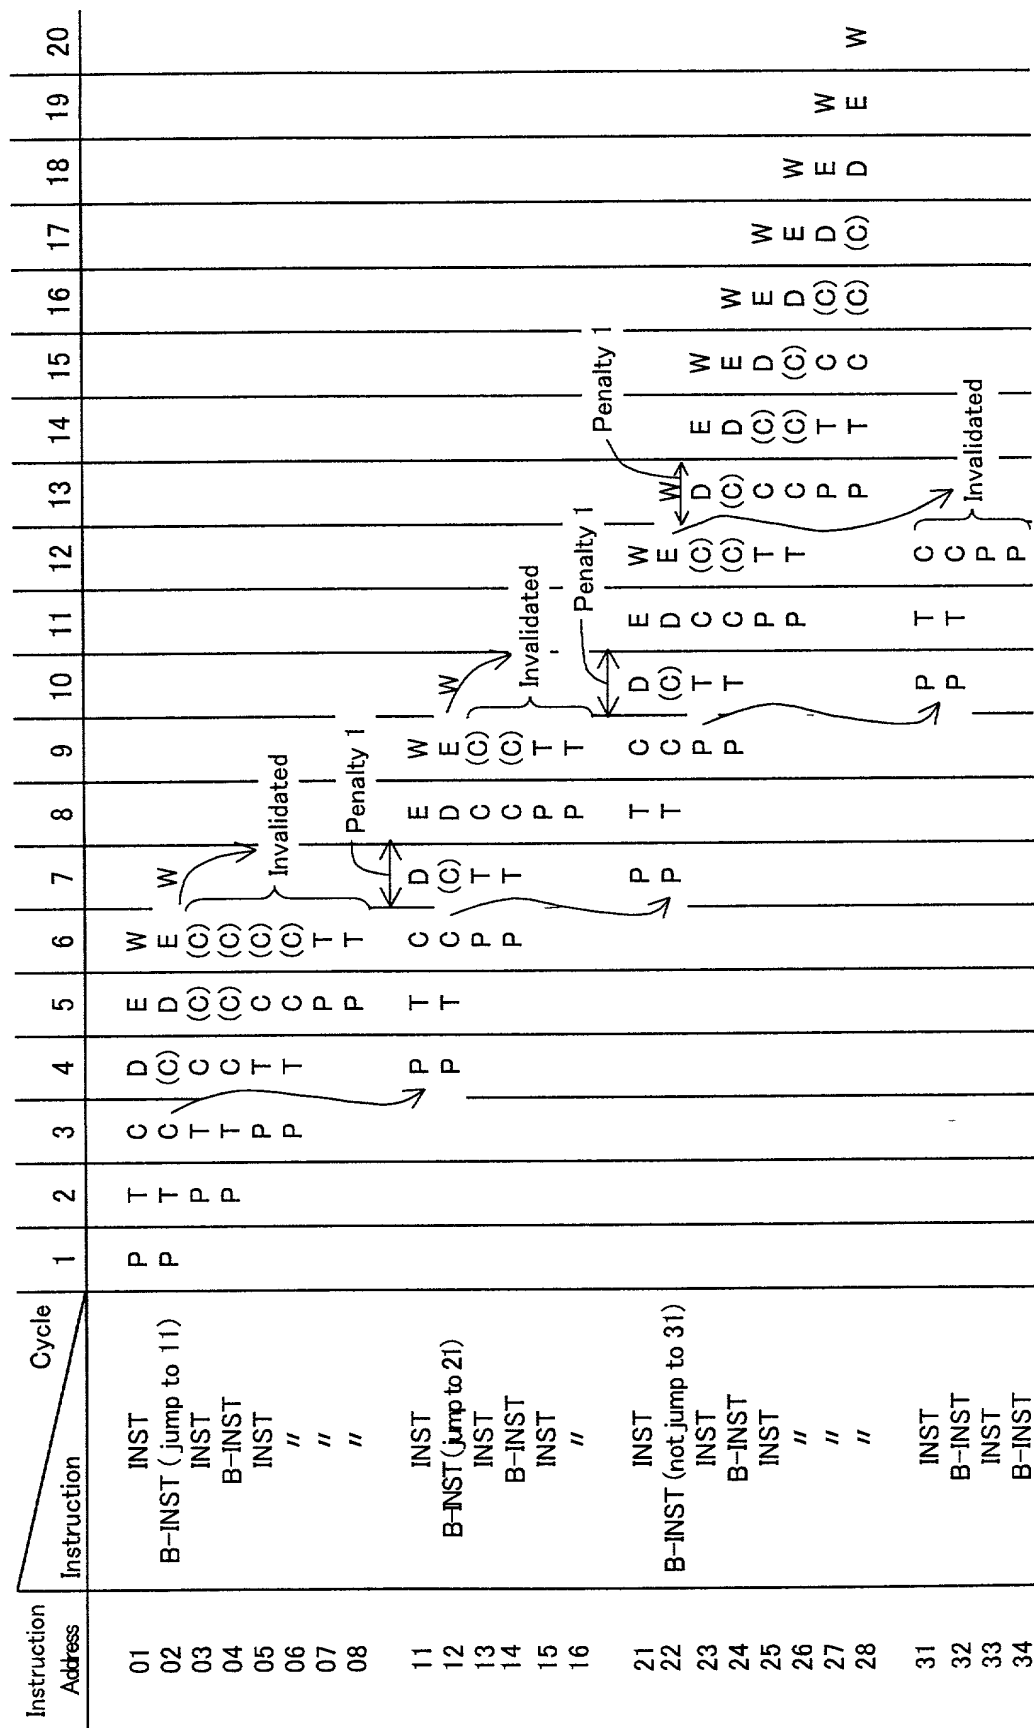


FIG. 6

At Cycle 3 for Branching Route (1)

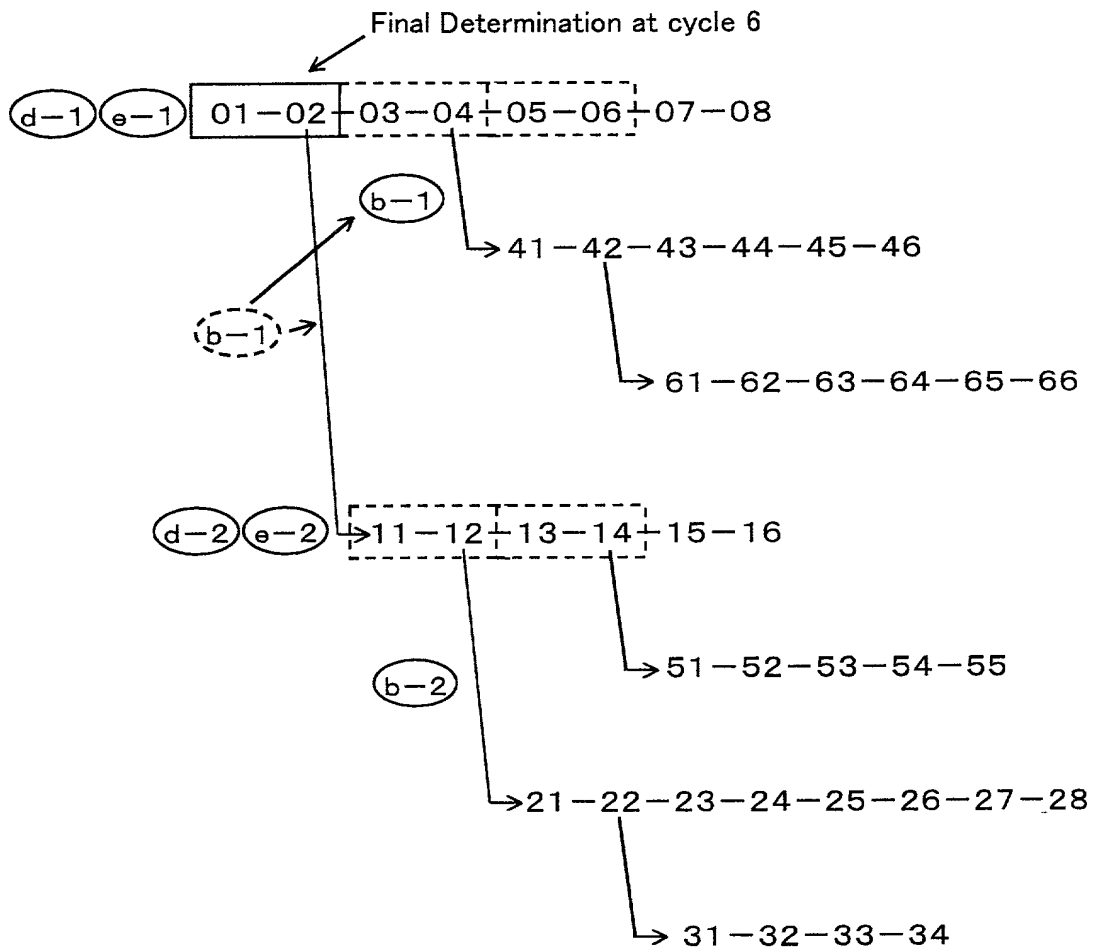


FIG. 7

At Cycle 6 for Route (1)

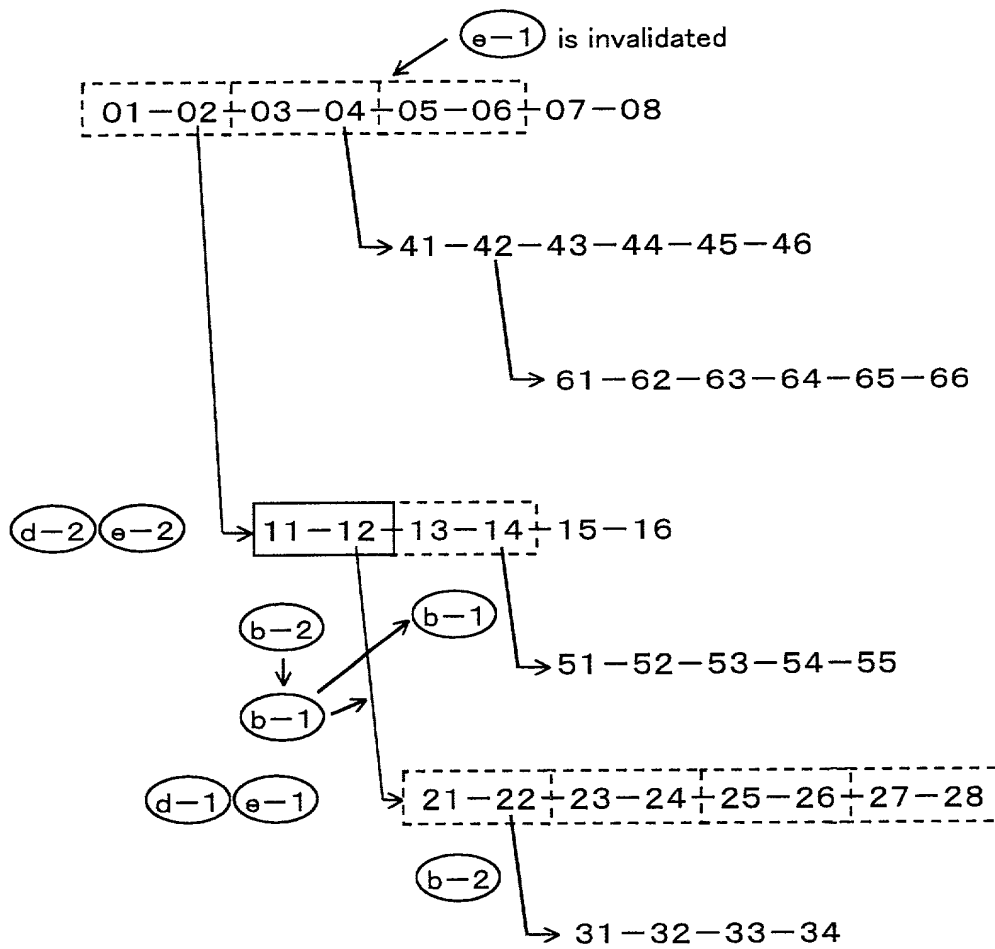


FIG. 8

At Cycle 9 for Route (1)

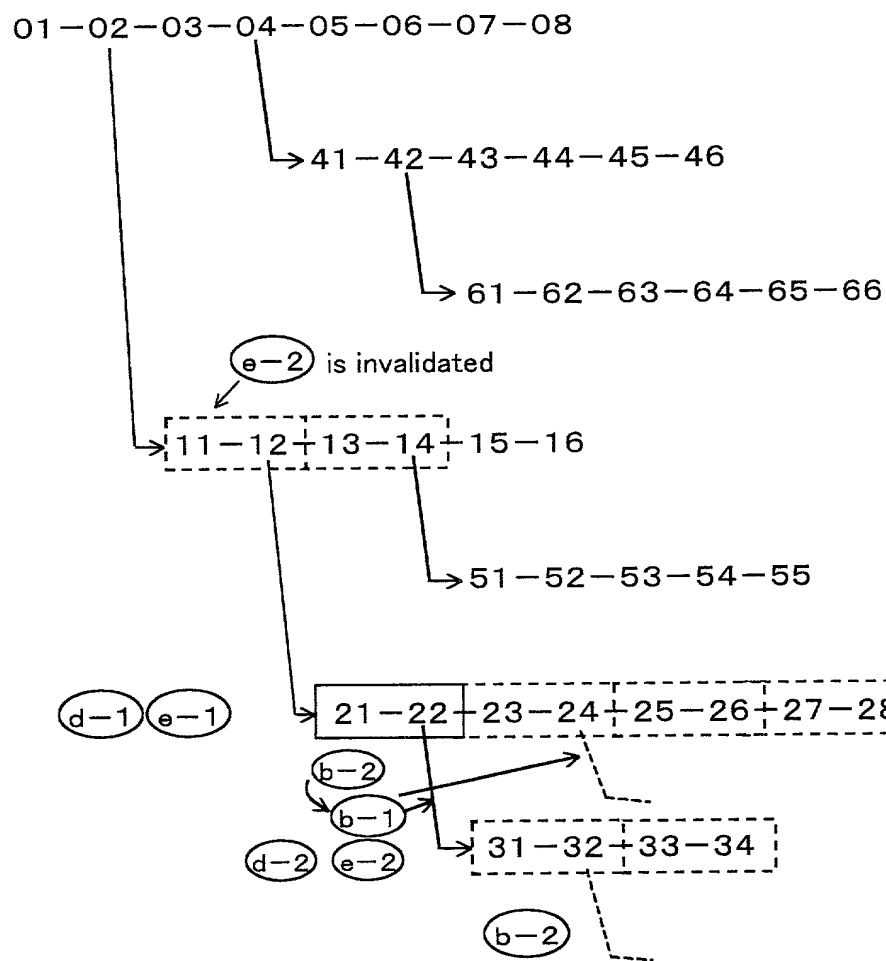


FIG. 9

Branching Route (2)


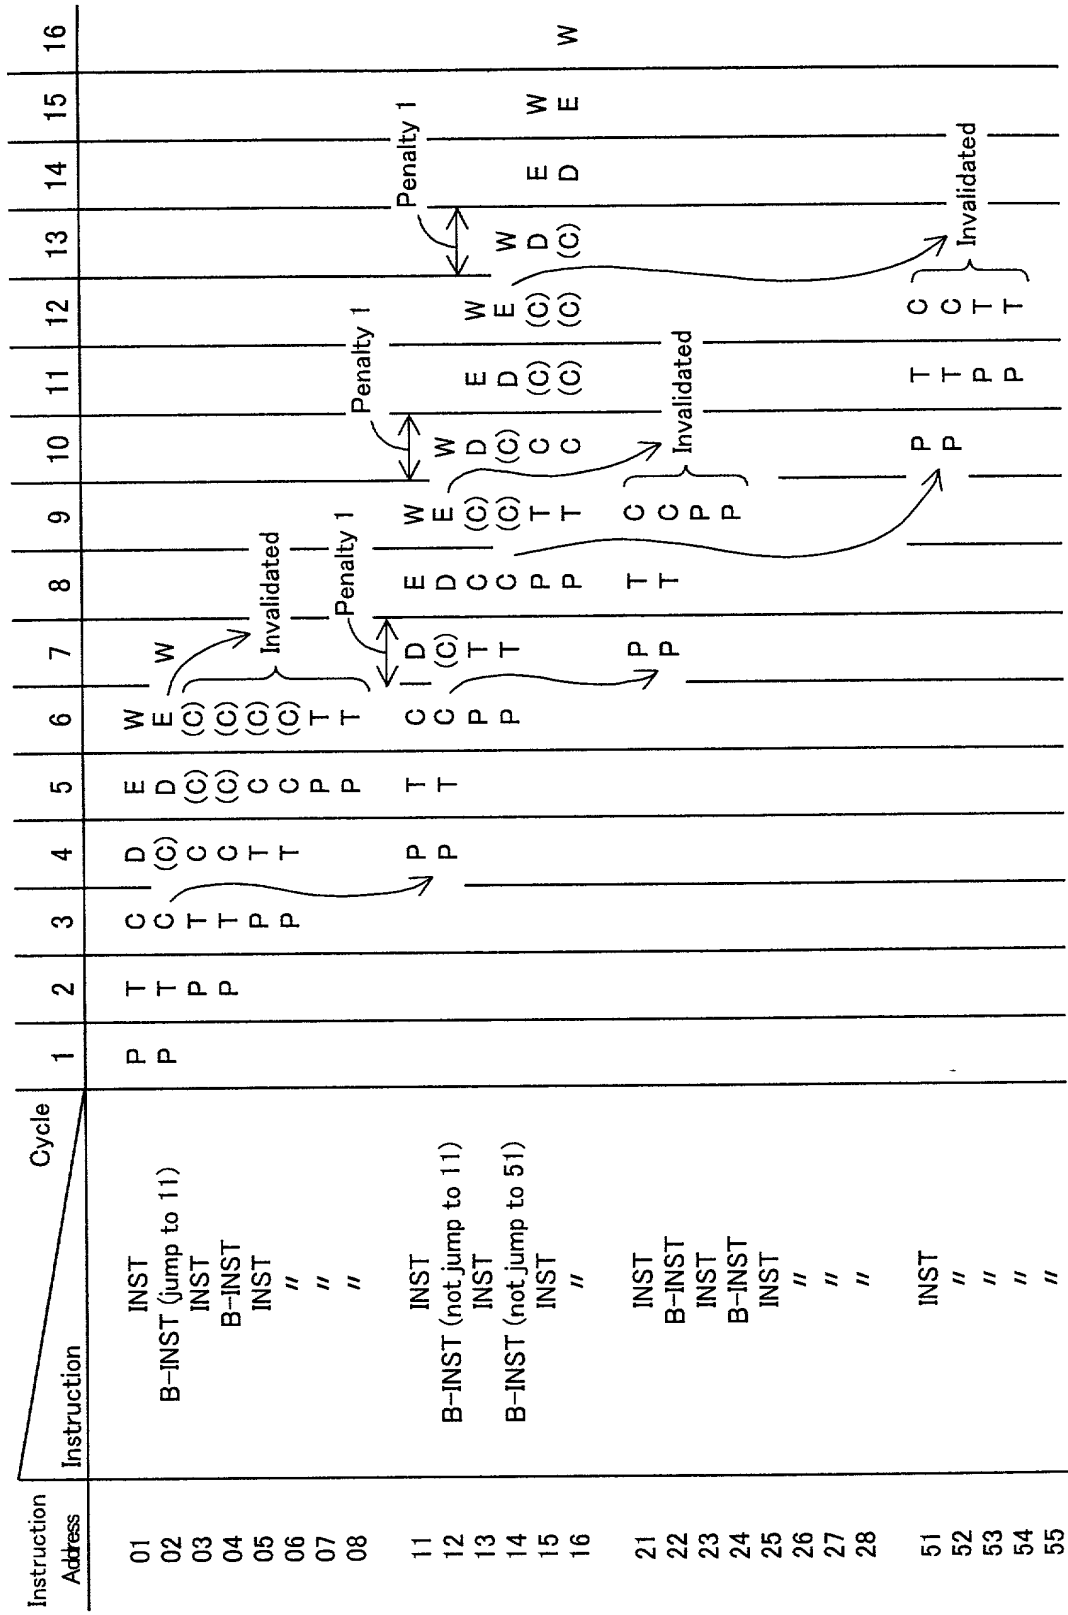


FIG. 11

At Cycle 6 of Route (3)

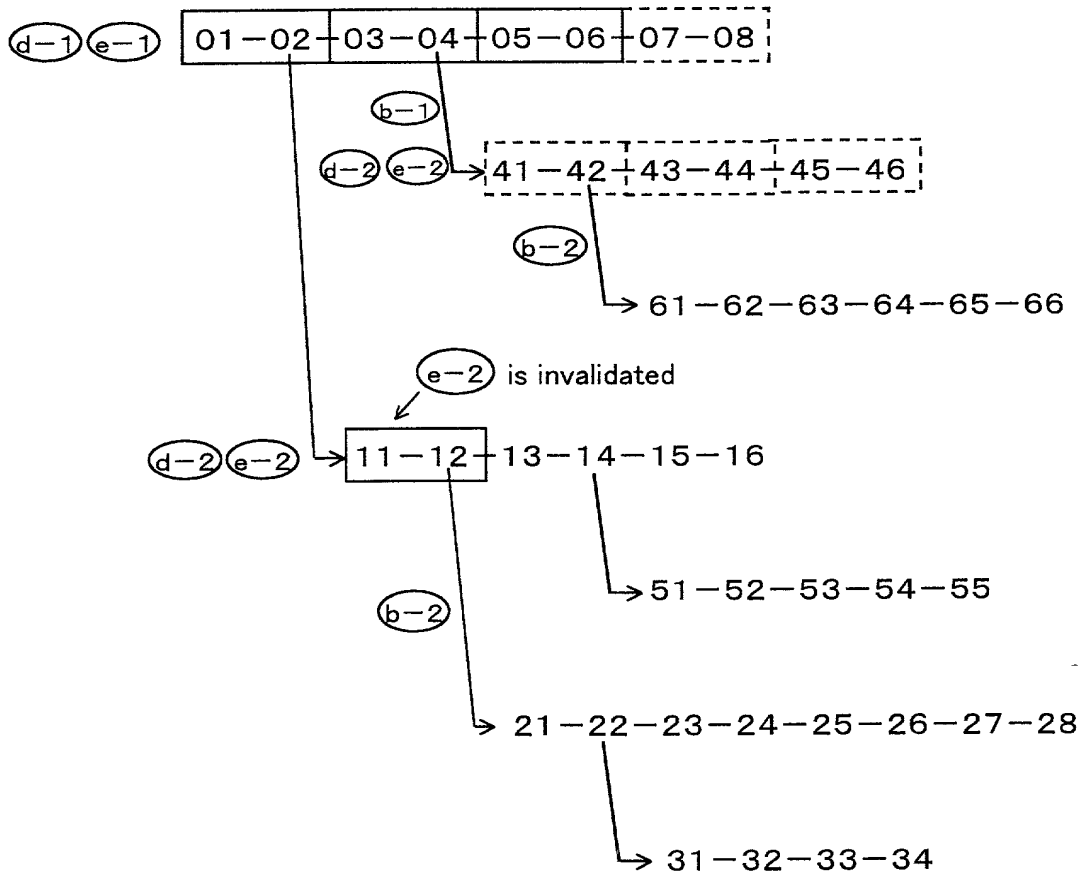

000260"E589360

FIG. 13

Prior Art

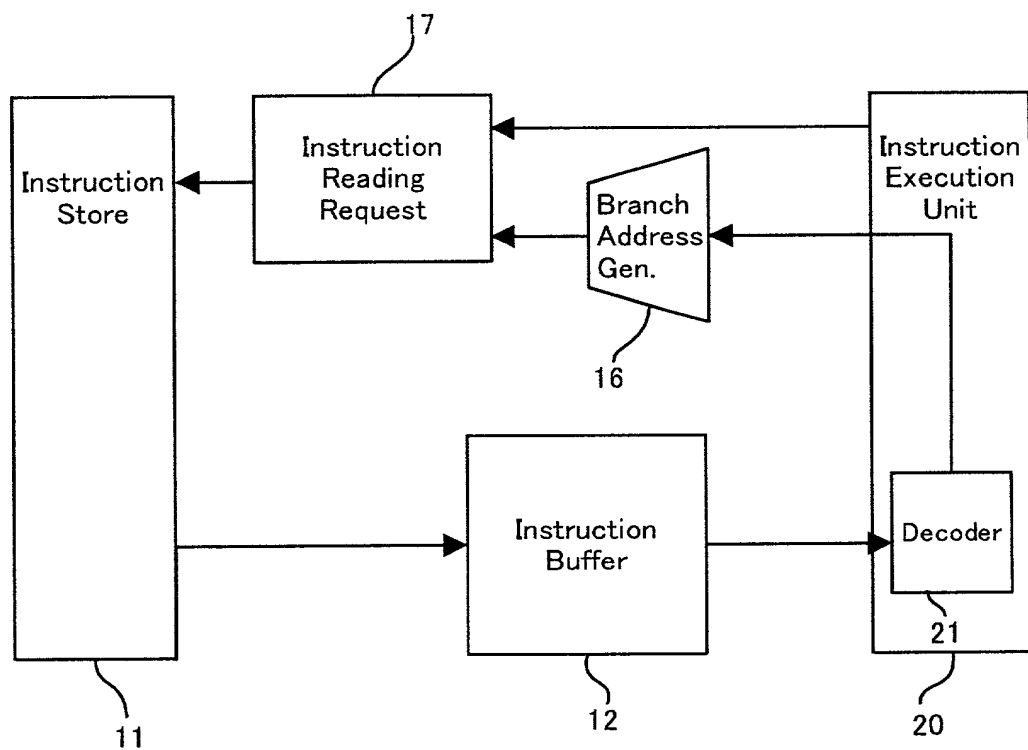


FIG. 14

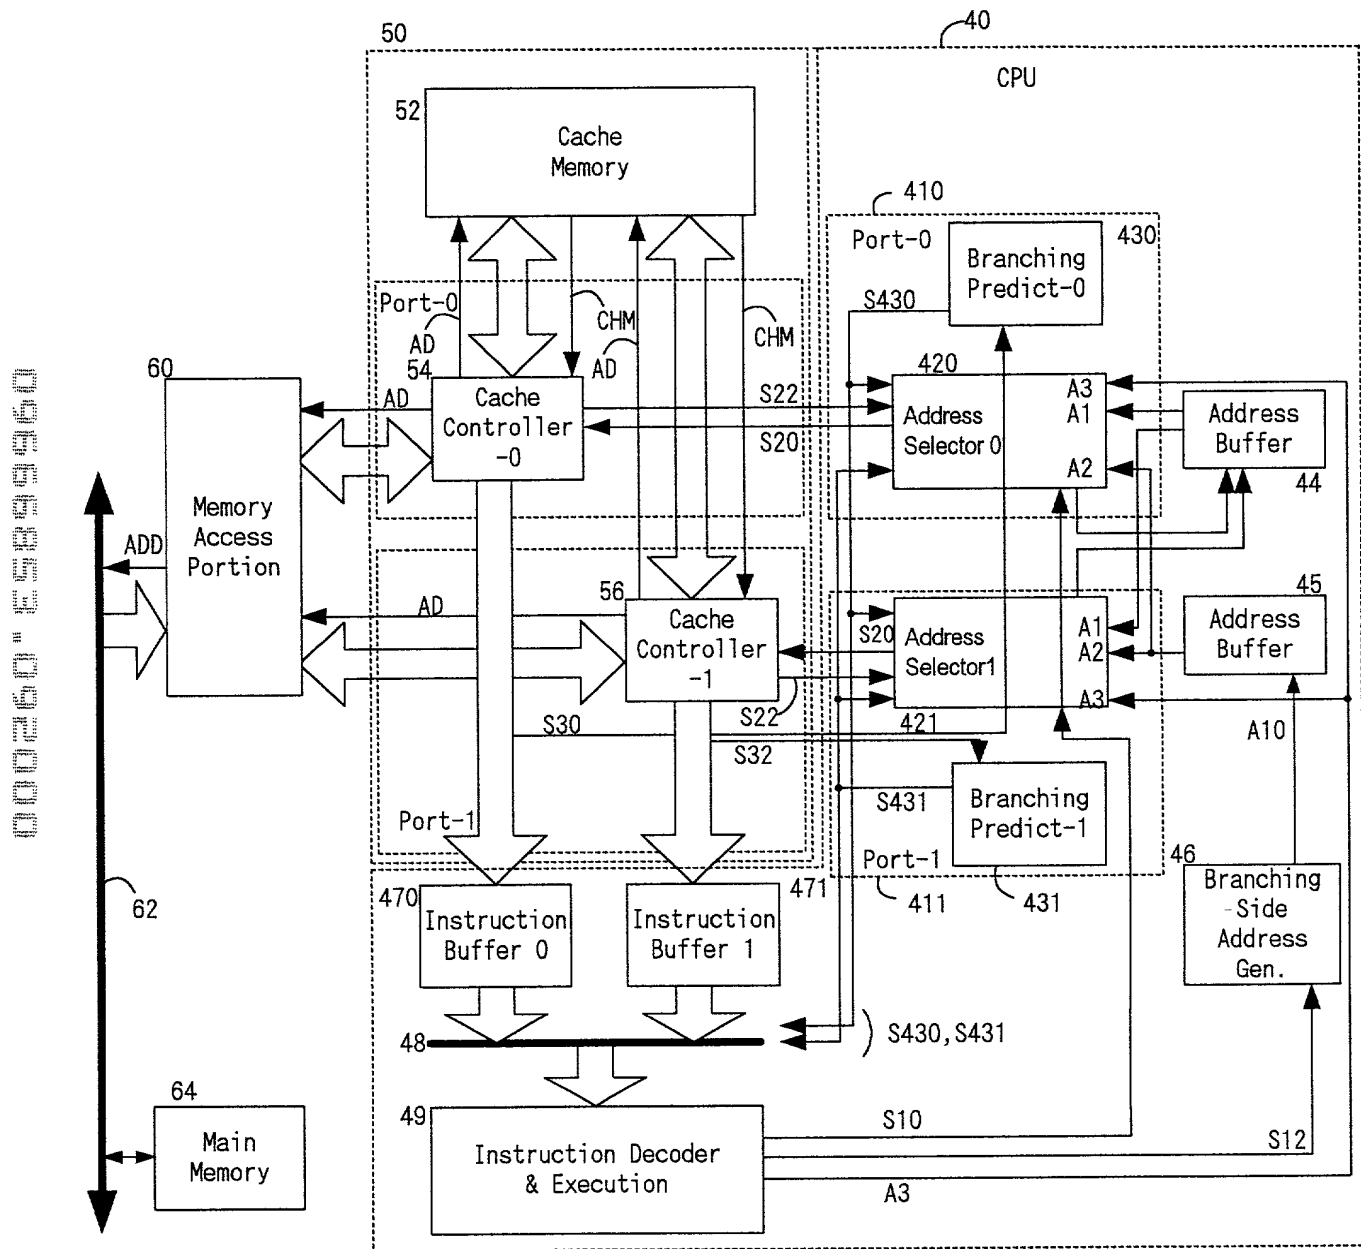


FIG. 15

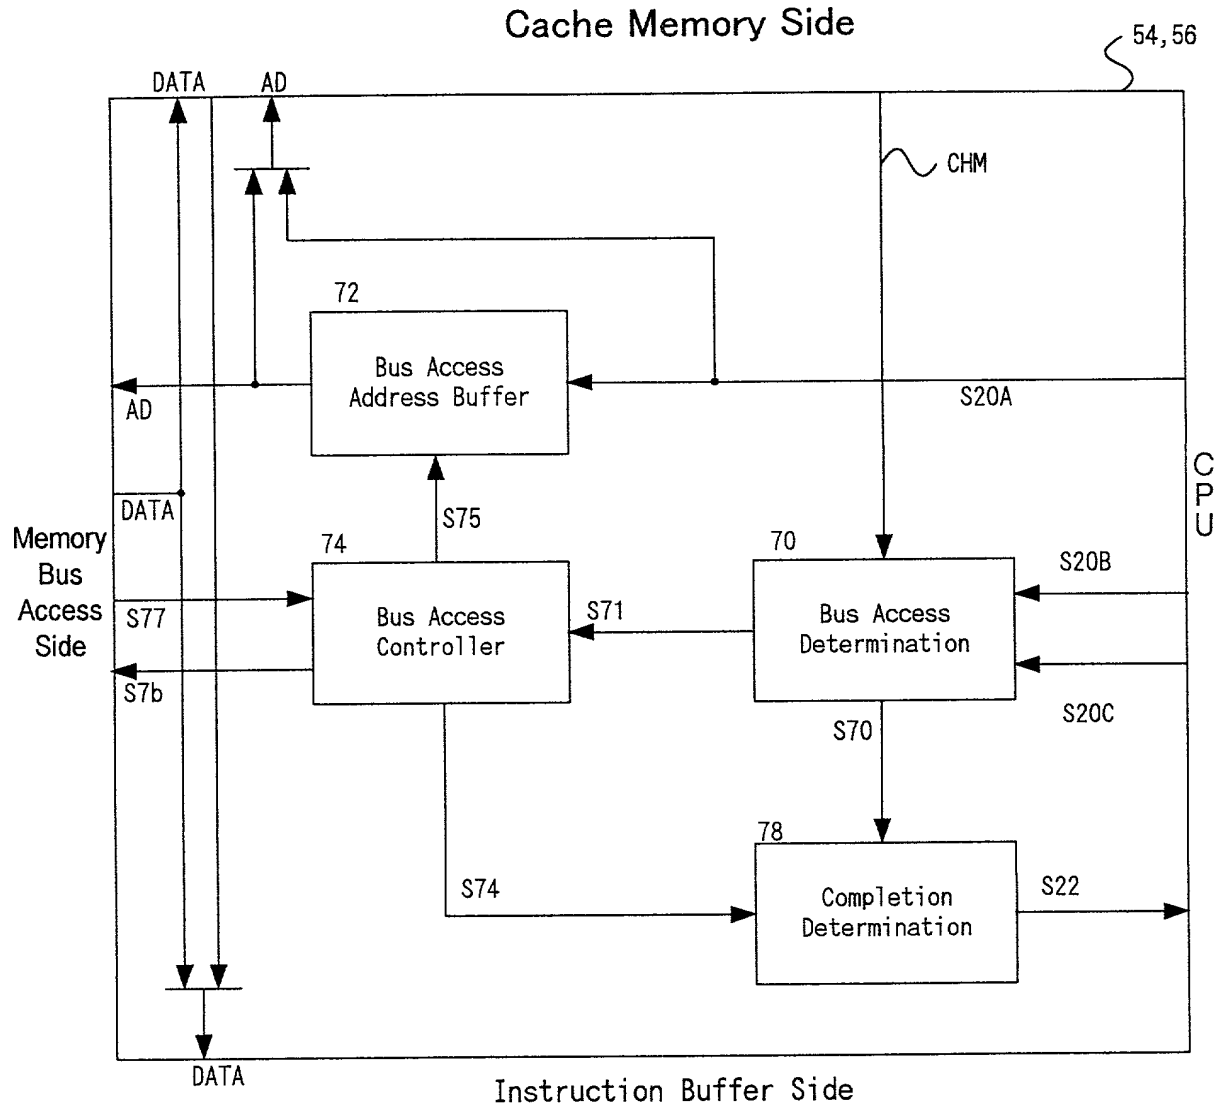


FIG. 16

First Control Example

	Branching direction not determined							
	Cache Hit		Memory Bus Access					
Predicted Branching Direction	Sequential Side	Target Side	Sequential Side		Target Side		Memory Bus Access after determined	
			Bus Access	Fetch	Bus Access	Fetch	S Sequential	T Target
Sequential Side	Miss	Miss	Yes	Yes	No	T	No	Yes
	Miss	Hit	Yes	Yes	No	Yes	No	No
	Hit	Miss	No	Yes	No	T	No	Yes
	Hit	Hit	No	Yes	No	Yes	No	No
Target Side	Miss	Miss	No	T	Yes	Yes	Yes	No
	Miss	Hit	No	T	No	Yes	Yes	No
	Hit	Miss	No	Yes	Yes	Yes	No	No
	Hit	Hit	No	Yes	No	Yes	No	No

FIG. 17

Second Control Example

	Branching direction not determined							
	Cache Hit		Memory Bus Access					
Predicted Branching Direction	Sequential Side	Target Side	Sequential Side		Target Side		Memory Bus Access after determined	
			Bus Access	Fetch	Bus Access	Fetch	S Sequential	T Target
Sequential Side	Miss	Miss	Yes	Yes	No	No	No	Yes
	Miss	Hit	Yes	Yes	No	Yes	No	No
	Hit	Miss	No	Yes	No	No	No	Yes
	Hit	Hit	No	Yes	No	Yes	No	No
Target Side	Miss	Miss	Yes	Yes	Yes	Yes	No	No
	Miss	Hit	Yes	Yes	No	Yes	No	No
	Hit	Miss	No	Yes	Yes	Yes	No	No
	Hit	Hit	No	Yes	No	Yes	No	No

FIG. 18

Third Control Example

	Branching direction not determined							
	Cache Hit		Memory Bus Access					
Predicted Branching Direction	Sequential Side	Target Side	Sequential Side		Target Side		Memory Bus Access after determined	
			Bus Access	Fetch	Bus Access	Fetch	S Sequential	T Target
Sequential Side	Miss	Miss	No	T	No	T	Yes	Yes
	Miss	Hit	No	T	No	Yes	Yes	No
	Hit	Miss	No	Yes	No	T	No	Yes
	Hit	Hit	No	Yes	No	Yes	No	No
Target Side	Miss	Miss	No	T	No	T	Yes	Yes
	Miss	Hit	No	T	No	Yes	Yes	No
	Hit	Miss	No	Yes	No	T	No	Yes
	Hit	Hit	No	Yes	No	Yes	No	No

FIG. 19

Fourth Control Example

	Branching direction not determined							
	Cache Hit		Memory Bus Access					
Predicted Branching Direction	Sequential Side	Target Side	Sequential Side		Target Side		Memory Bus Access after determined	
			Bus Access	Fetch	Bus Access	Fetch	S Sequential	T Target
Sequential Side	Miss	Miss	Yes	Yes	Yes	Yes	No	No
	Miss	Hit	Yes	Yes	No	Yes	No	No
	Hit	Miss	No	Yes	Yes	Yes	No	No
	Hit	Hit	No	Yes	No	Yes	No	No
Target Side	Miss	Miss	No	T	Yes	Yes	Yes	No
	Miss	Hit	No	T	No	Yes	Yes	No
	Hit	Miss	No	Yes	Yes	Yes	No	No
	Hit	Hit	No	Yes	No	Yes	No	No

FIG. 20

Embodiment

Cycle	1	2	3	4	5	6	7	8	9	10	11	12	13	14	·	30	31	32	33	34	35	36
INST 01	P	T	C	D	E	E	E	W														
02		P	T	C	D	D	D	E	W													
03			P	T	C	C	C	D	E	W												
04				P	T	C	C	C	D	E	W											
05					P	C	C	C	D	E	W											
06						T	C	C	D	E	W											
07							P	C	D	E	W											
08								T	C	D	E	W										
09									P	C	D	E	W									
10										T	C	D	E	W								
11											P	C	D	E	W							
12												P	C	D	E	W						
51						P	T	M														
52							P	T	M													
53								T	M	M												

INST 01→INST 02→INST 03→INST 04→INST 05→INST 06→INST 07→INST 08→INST 09→
 ↳INST 51→INST 52→INST 53→INST 54→

(INST 03 is branching instruction, is predicted not to branch, and does not branch is fact)

FIG. 21

Prior Art

Cycle	1	2	3	4	5	6	7	8	9	10	11	12	13	14	·	28	29	30	·	46	47	48
INST 01	P	T	C	D	E	E	E	W														
02		P	T	C	D	D	D	E	W													
03			P	T	C	C	C	D	E	W												
04				P	T	C	C	C	D	E	W											
05					P	C	C	C	D	E	W											
06						T	C	C	D	E	W											
07							P	C	D	E	W											
08								T	C	D	E	W										
09									P	C	D	E	W									
10										T	C	D	E	W								
11											P	C	D	E	W							
12												P	C	D	E	W						
51						P	T	M	B	R	·	·	·	·	·	C	·	·	·			
52							P	T	M	B	B	B	B	B	·	·	·	C	·			
53								T	M	B	B	B	B	B	·	·	·	·	C			

INST 01→INST 02→INST 03→INST 04→INST 05→INST 06→INST 07→INST 08→INST 09→
 ↳INST 51→INST 52→INST 53→INST 54→

(INST 03 is branching instruction, is predicted not to branch, and does not branch is fact)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application**特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INFORMATION PROCESSING DEVICE

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-276625

(Number)

(番号)

11-341014

(Number)

(番号)

Japan

(Country)

(国名)

Japan

(Country)

(国名)

私と、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自身の知識に基づいて本宣言書で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

29/09/1999

(Day/Month/Year Filed)

(出願年月日)

30/11/1999

(Day/Month/Year Filed)

(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

書類送付先

Aaron B. KARAS, Reg. No. 18,923; Samson HELFGOTT, Reg. No. 23,072 and Leonard COOPER Reg. No. 27,625
Send Correspondence to:

HELFGOTT & KARAS, P.C.
Empire State Building, 60th Floor
New York, New York 10118
United States of America

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Helfgott & Karas, P.C.
(212) 643-5000

唯一または第一発明者名	Full name of sole or first inventor	Shin-ichiro TAGO	
発明者の署名	日付	Inventor's signature	Date
		<i>Shin-ichiro Tago</i>	13/09/2000
住所	Residence	Kawasaki, Japan	
国籍	Citizenship	Japan	
私書箱	Post Office Address	c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome,	
		Nakahara-ku, Kawasaki, 211-8588 Japan	
第二共同発明者	Full name of second joint inventor, if any	Taizo SATO	
第二共同発明者	日付	Second inventor's signature	Date
		<i>Taizo Sato</i>	13/09/2000
住所	Residence	Kawasaki, Japan	
国籍	Citizenship	Japan	
私書箱	Post Office Address	c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome,	
		Nakahara-ku, Kawasaki, 211-8588 Japan	

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者	Full name of third joint inventor, if any Yoshimasa TAKEBE		
第三共同発明者	日付	Third inventor's signature Yoshimasa Takebe	Date 13/09/2000
住 所	Residence Kawasaki, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan		
第四共同発明者	Full name of fourth joint inventor, if any Yasuhiro YAMAZAKI		
第四共同発明者	日付	Fourth inventor's signature Yasuhiro Yamazaki	Date 13/09/2000
住 所	Residence Kawasaki, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan		

第五共同発明者	Full name of fifth joint inventor, if any Teruhiko KAMIGATA		
第五共同発明者	日付	Fifth inventor's signature Teruhiko Kamigata	Date 13/09/2000
住 所	Residence Kawasaki, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan		
第六共同発明者	Full name of sixth joint inventor, if any Atsuhiko SUGA		
第六共同発明者	日付	Sixth inventor's signature Atsuhiko Suga	Date 13/09/2000
住 所	Residence Kawasaki, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan		

(第七以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for seventh and subsequent joint inventors.)

第七共同発明者	Full name of seventh joint inventor, if any Hiroshi OKANO		
第七共同発明者	日付	Seventh inventor's signature Hiroshi Okano	Date 13/09/2000
住 所	Residence Kawasaki, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan		
第八共同発明者	Full name of eighth joint inventor, if any Hitoshi YODA		
第八共同発明者	日付	Eighth inventor's signature Hitoshi Yoda	Date 13/09/2000
住 所	Residence Kawasaki, Japan		
国 籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan		

第九共同発明者	Full name of ninth joint inventor, if any		
第九共同発明者	日付	Ninth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		
第十共同発明者	Full name of tenth joint inventor, if any		
第十共同発明者	日付	Tenth inventor's signature	Date
住 所	Residence		
国 籍	Citizenship		
私書箱	Post Office Address		

(第十一以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for eleventh and subsequent joint inventors.)

THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of: **Shin-ichiro TAGO et al.**

Filed : **Concurrently herewith**

For : **INFORMATION PROCESSING DEVICE**

Serial No. : **Concurrently herewith**

September 20, 2000


Assistant Commissioner of Patents
Washington, D.C. 20231

SUB-POWER OF ATTORNEY

S I R:

I, Samson Helfgott, Reg. No. 23,072 attorney of record herein, do hereby grant a sub-power of attorney to Linda S. Chan, Reg. No. 42,400, Jacqueline M. Steady, Reg. No., 44,354, Harris A. Wolin, Reg. No. 39,432 and Brian S. Myers, Reg. No. 46,947 to act and sign in my behalf in the above-referenced application.

Respectfully submitted,

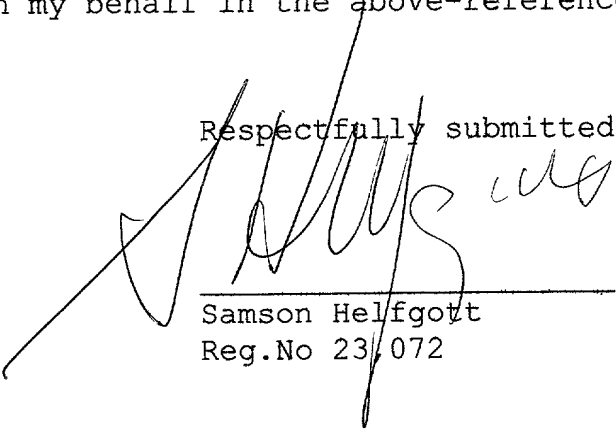

Samson Helfgott
Reg.No 23,072

HELFGOTT & KARAS, P.C.
60th FLOOR
EMPIRE STATE BUILDING
NEW YORK, NY 10118
DOCKET NO.:FUJH17.759
LHH:power

Filed Via Express Mail

Rec. No.:EL522335455US

On: September 20, 2000

By: Lydia Gonzalez

Any fee due as a result of this paper,
not covered by an enclosed check may
be charged on Deposit Acct. No. 08-
1634.

000250" E589950